

# 30V,200mA,3uA,Low-Dropout Voltage Regulator


## Features

- Low quiescent current : 3uA
- Wide input voltage range : 3V to 30V
- High output current : 200mA
- Low dropout voltage : 700mV at 100mA
- Fixed output voltages : 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 3.6V, 4.0V, 4.2V and 5.0V
- Output voltage tolerance :  $\pm 1/2\%$
- Current limit protection
- Short circuit protection
- Thermal shutdown protection
- Available packages: SOT23-3, SOT89-3, SOT23-5

## Applications

- Battery-powered equipment
- Smoke detector and sensor
- Micro controller applications
- Home appliance

## Typical Application

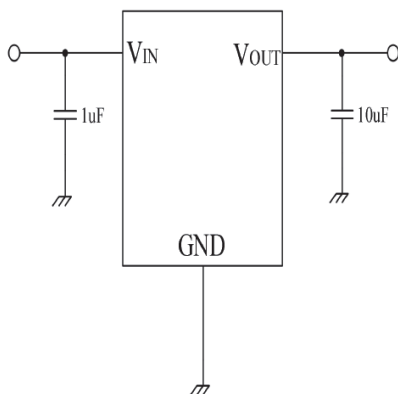

30V, Low-dropout voltage regulator

## Description


The OSU22XX series is an ultra-small, low dropout (LDO) linear regulator that can source 200mA of output current. The OSU22XX series is designed to provide high input voltage, and excellent load and line transient performance.

The OSU22XX series has thermal shutdown, current limit, and short circuit protections for added safety.

The OSU22XX series contains nine fixed output voltages of 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 3.6V, 4.0V, 4.2V and 5.0V.

PART NUMBER	PACKAGE	BODY SIZE(NOM)
OSU22XXA/BTE	SOT23-3	2.9mm*2.8mm
OSU22XXA/BTS	SOT89-3	4.5mm*4.2mm
OSU22XXA/BTG	SOT23-5	2.9mm*2.8mm


## PSRR

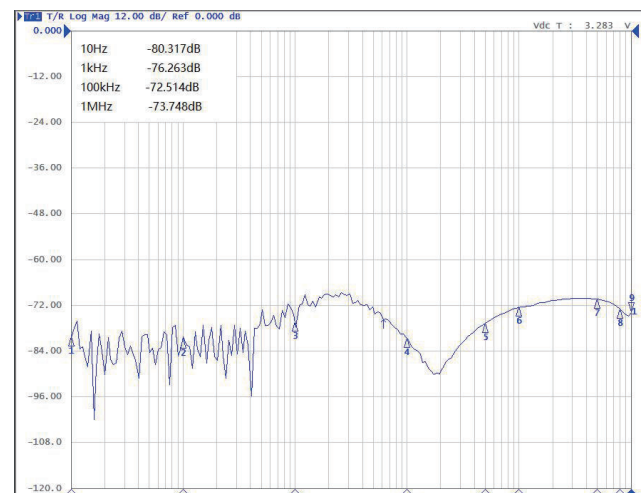

$V_{IN}=5.3V, V_{OUT}=3.3V, I_{OUT}=10mA$

**30V,200mA,3uA,Low-Dropout Voltage Regulator**

**Pin Configuration and Functions**

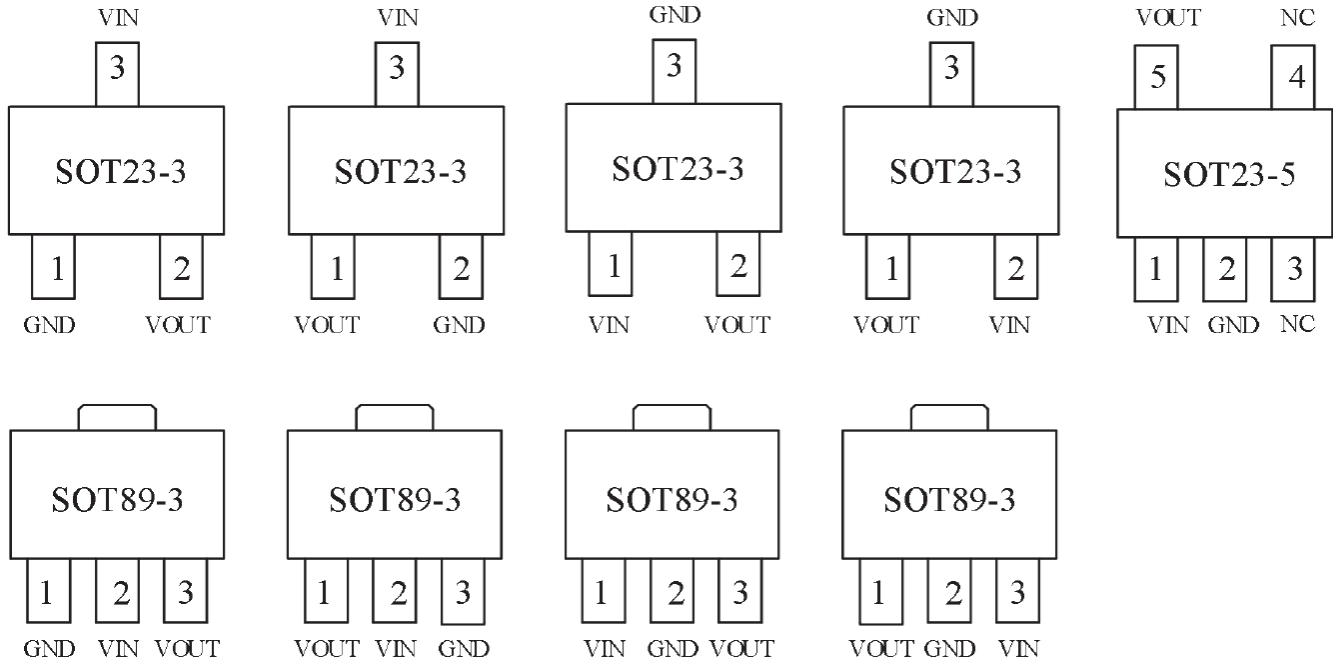

**Pin functions**

Name	SOT23-3				Description
	OSU22XXA/BTE	OSU22XXA/BTE-A	OSU22XXA/BTE-B	OSU22XXA/BTE-C	
GND	1	2	3	3	Ground pin
VOUT	2	1	2	1	Output pin
VIN	3	3	1	2	Input pin
Name	SOT89-3				Description
	OSU22XXA/BTS	OSU22XXA/BTS-A	OSU22XXA/BTS-B	OSU22XXA/BTS-C	
GND	1	3	2	2	Ground pin
VOUT	3	1	3	1	Output pin
VIN	2	2	1	3	Input pin
Name	SOT23-5				Description
	OSU22XXA/BTG				
VIN	1				Input pin
GND	2				Ground pin
NC	3				No connection
NC	4				No connection
VOUT	5				Output pin

**30V,200mA,3uA,Low-Dropout Voltage Regulator**
**Absolute Maximum Ratings**

Parameter	Description	Min	Max	Unit
Input voltage	VIN to GND	-0.3	36	V
	VOUT to GND	-0.3	7	V
	VIN to VOUT	-0.3	31	V
Current	Peak output current	Internally limited		
Temperature	Operating temperature range	-40	125	°C
	Storage temperature	-40	150	°C
Thermal resistance (Junction to ambient)	SOT89-3	130		°C/W
	SOT23-3	200		°C/W
	SOT23-5	200		°C/W
Power dissipation	SOT89-3	900		mW
	SOT23-3	600		mW
	SOT23-5	600		mW

**Note:**

exceeding the range specified by the rated parameters will cause damage to the chip, and the working state of the chip beyond the range of rated parameters cannot be guaranteed. Exposure outside the rated parameter range will affect the reliability of the chip.

**ESD Ratings**

Parameter	Description	Range	Unit
V <sub>ESD</sub>	Human body model(HBM)	3	KV

**Note:**

JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

**30V,200mA,3uA,Low-Dropout Voltage Regulator**
**Electrical Characteristics**

 (At  $T_A=25^{\circ}\text{C}$ ,  $C_{IN}=1\mu\text{F}$ ,  $V_{IN}=V_{OUTNOM}+1.0\text{V}$ ,  $C_{OUT}=10\mu\text{F}$ , unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{IN}$	Operating input voltage		3	—	30	V
$I_{GND}$	Quiescent current	$V_{IN}=12\text{V}$ , No load	—	3	—	$\mu\text{A}$
$V_{OUT}$	Output voltage	$V_{IN}=12\text{V}$ , $I_{OUT}=10\text{mA}$	$V_{OUTNOM} * 0.98$	$V_{OUTNOM}$	$V_{OUTNOM} * 1.02$	V
$I_{OUT\_MAX}$	Output current		200	—	—	mA
$V_{DROP}$	Dropout voltage	$I_{OUT}=100\text{mA}$ , $V_{IN}=V_{OUTNOM}-0.1\text{V}$	—	700	—	mV
$\Delta V_{OUT}/\Delta I_{OUT}$	Load regulation	$V_{IN}=7\text{V}$ , $1\text{mA} \leq I_{OUT} \leq 150\text{mA}$	—	0.1	—	mV/mA
$\Delta V_{OUT}/\Delta V_{IN}$	Line regulation	$I_{OUT}=1\text{mA}$ , $V_{OUTNOM}+1\text{V} \leq V_{IN} \leq 30\text{V}$	—	0.1	—	mV/V
$I_{LIMIT}$	Current limit		—	350	—	mA
$I_{SHORT}$	Short current	$V_{IN}=12\text{V}$	—	100	—	mA
$T_{SHDN}$	Thermal shutdown temperature	Shutdown, temperature increasing	—	135	—	$^{\circ}\text{C}$
		Reset, temperature decreasing	—	119	—	







**Note :**

Dropout Voltage is the voltage difference between the input and the output at which the output voltage drops 2% below its nominal value.

30V,200mA,3uA,Low-Dropout Voltage Regulator

Typical Characteristics

(At  $T_A=25^{\circ}\text{C}$ ,  $C_{IN}=1\mu\text{F}$ ,  $V_{IN}=V_{OUTNOM}+2\text{V}$ ,  $C_{OUT}=10\mu\text{F}$  unless otherwise noted)

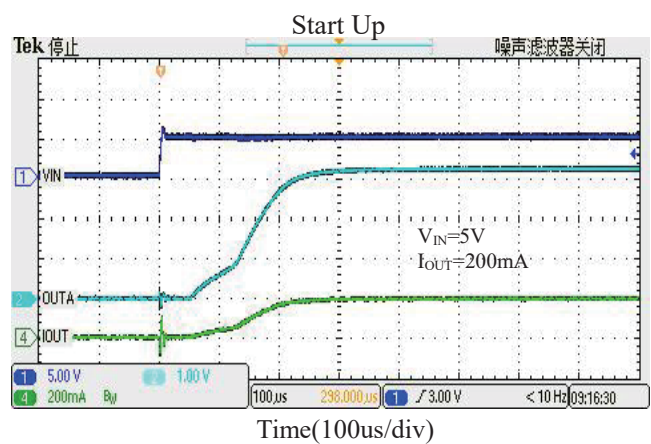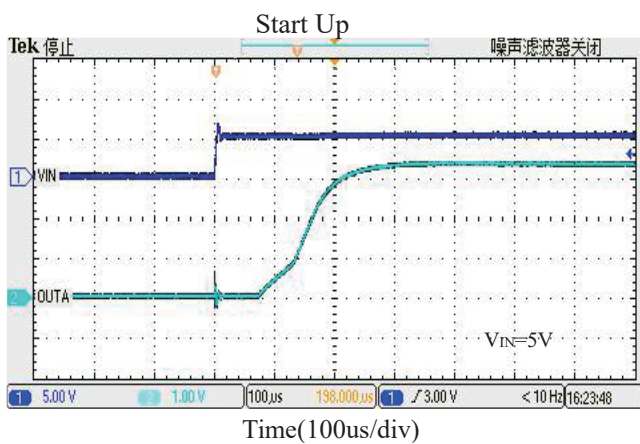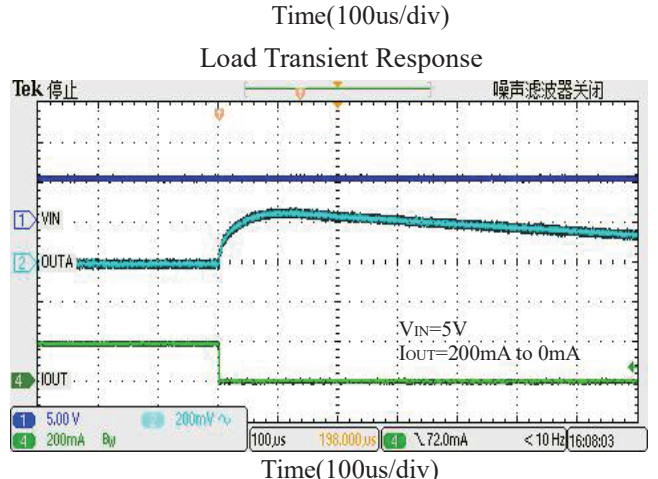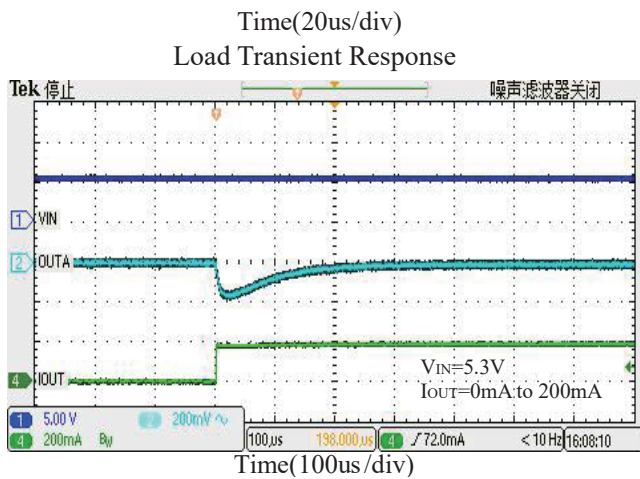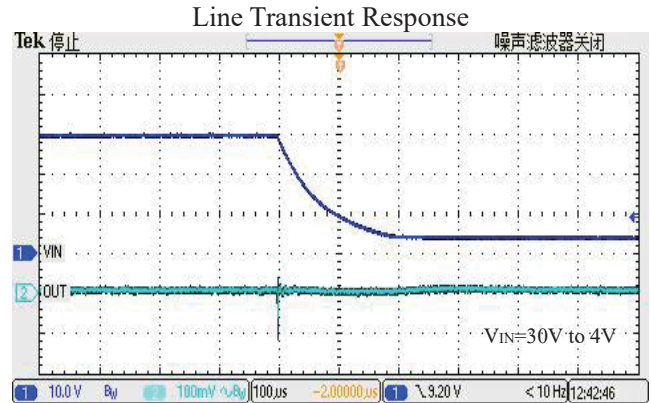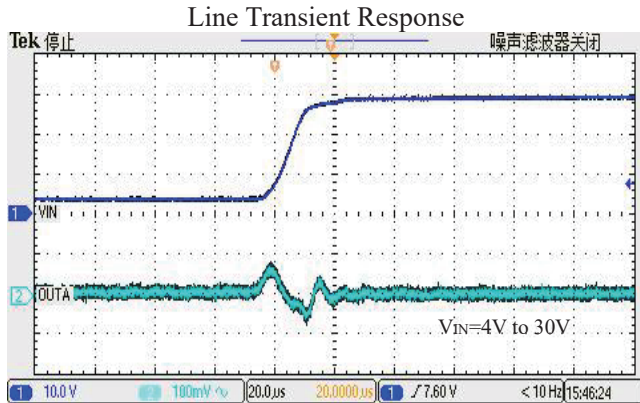


**30V,200mA,3uA,Low-Dropout Voltage Regulator**

**Detailed Description**

**Overview**

The OSU22XX series is an ultra-small, low dropout (LDO) linear regulator that can source 200mA of output current. The OSU22XX series is designed to provide high input voltage, and excellent load and line transient performance. The OSU22XX series has thermal shutdown, current limit, and short circuit protections for added safety. The OSU22XX series contains nine fixed output voltages of 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 3.6V, 4.0V, 4.2V and 5.0V.

**Functional Block Diagram**

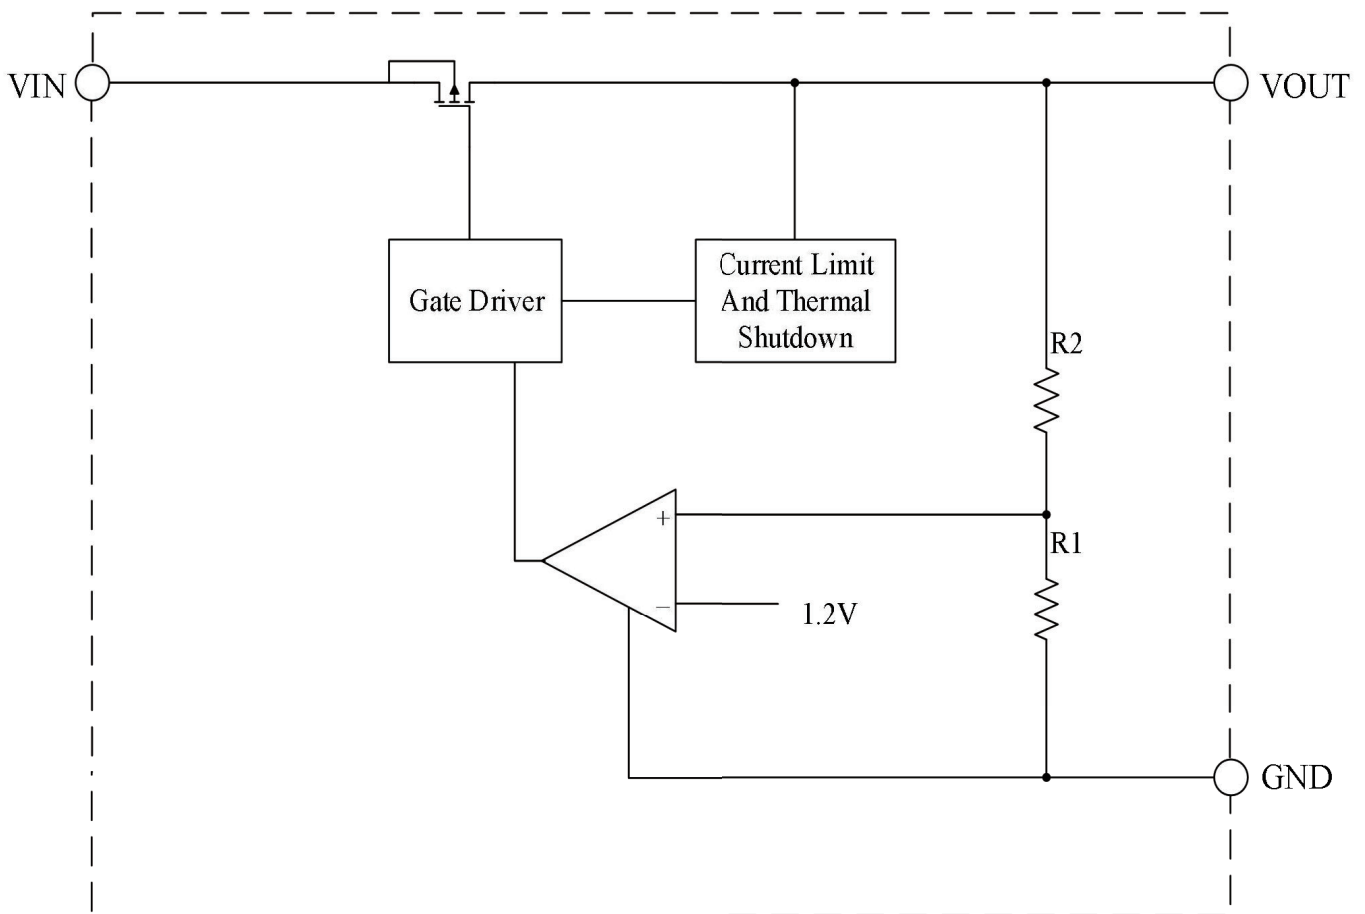


**Functional block diagram**

## 30V,200mA,3uA,Low-Dropout Voltage Regulator

### Input Capacitor and Output Capacitor

A 1uF ceramic capacitor is recommended to connect between VIN and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and less noise. For PCB layout, a wide copper trace is required for both VIN and GND. When  $V_{IN} \geq 18V$ , it is recommended to add R1 ( $R1 > 1\Omega$ , The resistance shall be adjusted according to the actual application) at the input end.

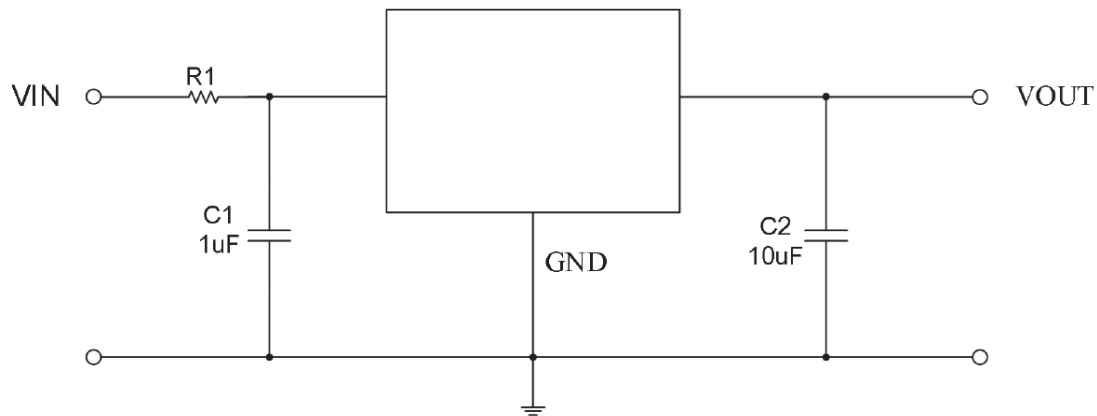

An output capacitor is required for the stability of the LDO. The recommended minimum output capacitance is 10uF, ceramic capacitor is recommended, and temperature characteristics are X5R or X7R. Higher capacitance values help to improve load/line transient response. The output capacitance may be increased to keep low undershoot/overshoot. Place output capacitor as close as possible to VOUT and GND pins.

### Current Limit and Short Circuit Protection

When output current at VOUT pin is higher than current limit threshold or the VOUT pin is direct short to GND, the current limit protection will be triggered and clamp the output current at a pre-designed level to prevent over-current and thermal damage.

### Power Dissipation and Thermal Protection

The OSU22XX has internal thermal sense and protection circuits. When excessive power dissipation happens on the device, such as short circuit at the output pin or very heavy load current with a large voltage drop across the device, the internal thermal protection circuit will be triggered, and it will shut down the power MOSFET to prevent the LDO from damage. As soon as excessive thermal condition is removed and the temperature of the device drops down, the thermal protection circuit will lease the control of the power MOSFET, and the LDO device goes to normal operation. Power dissipation caused by voltage drop across the LDO and by the output current flowing through the device needs to be dissipated out from the chip. The maximum junction temperature is dependent on power dissipation, package, the PCB layout, number of used Cu layers, Cu layers thickness and the ambient temperature.

## 30V,200mA,3uA,Low-Dropout Voltage Regulator

During normal operation, LDO junction temperature should not exceed 150°C, or else it may result in deterioration of the properties of the chip. Using below equations to calculate the power dissipation and estimate the junction temperature.

The power dissipation can be calculated using Equation(1) .

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} \quad (1)$$

The junction temperature can be estimated using Equation .  $R_{\theta JA\_EVM}$  is the junction-to-ambient thermal resistance based on customer's PCB. Verify the application and allow sufficient margins in the thermal design by the Equation (2).

$$T_J = T_A + P_D \times R_{\theta JA\_EVM} \quad (2)$$

$R_{\theta JA\_EVM}$  is a critical parameter and depends on many factors such as the following:

- Power dissipation
- Air temperature/flow
- PCB area
- Copper heat-sink area
- Number of thermal vias under the package
- Adjacent component placement


**30V,200mA,3uA,Low-Dropout Voltage Regulator**

**Ordering And Marking Information**

<p><b>Part Number</b></p> <p>OS U22XX B TE - A</p> <p>Pin definition Package definition Voltage accuracy Product name Company name</p>	<p><b>Package Outline</b></p>			
	<p><b>Minimum Package</b></p> <table border="1"> <tr> <td>SOT23-5 3000pcs/Reel</td> <td>SOT23-3 3000pcs/Reel</td> <td>SOT89-3 1000pcs/Reel</td> </tr> </table>	SOT23-5 3000pcs/Reel	SOT23-3 3000pcs/Reel	SOT89-3 1000pcs/Reel
	SOT23-5 3000pcs/Reel	SOT23-3 3000pcs/Reel	SOT89-3 1000pcs/Reel	
<p><b>Marking</b></p> <p>22XXB 221</p> <p>B:B(±2%) A(±1%) C(±3%) XX: 18(1.8V) 33(3.3V) 30(3.0V) 50(5.0V) T:Internal Code.Variable. 221:2-2022;21-the 21th week of this year</p>				


**Package Outline**

**SOT23-3**

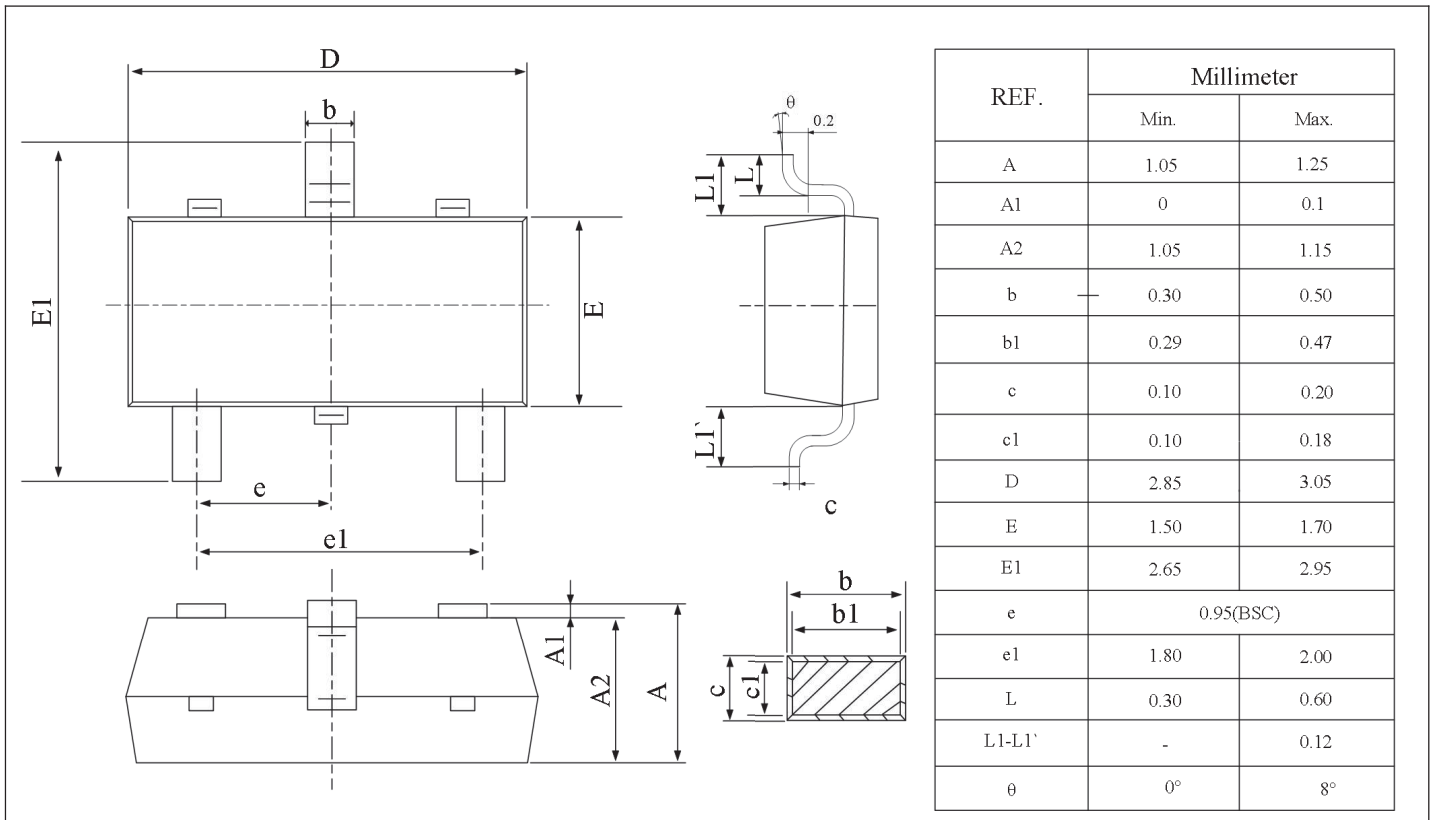


**30V,200mA,3uA,Low-Dropout Voltage Regulator**

**SOT89-3**

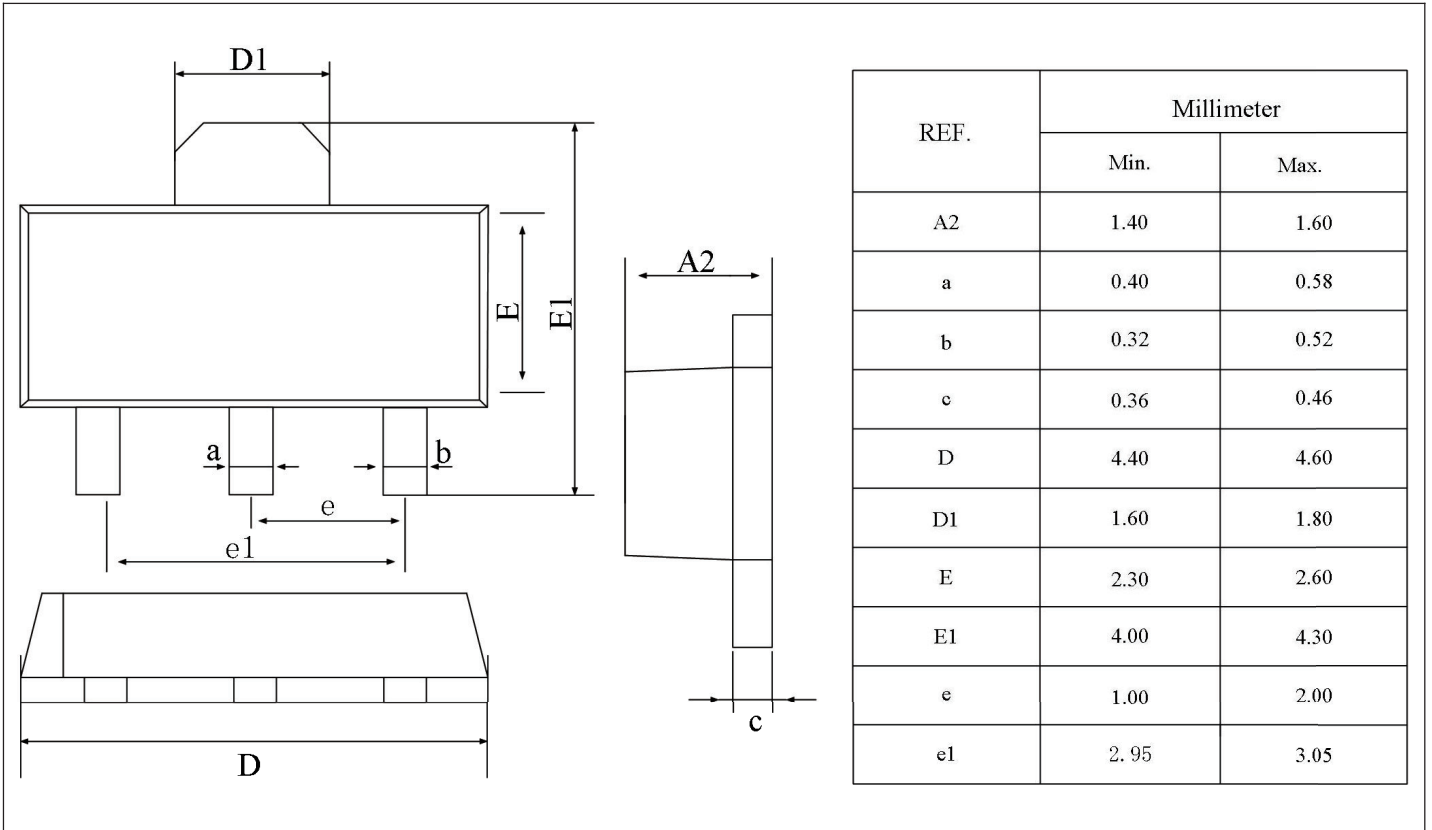


**SOT23-5**

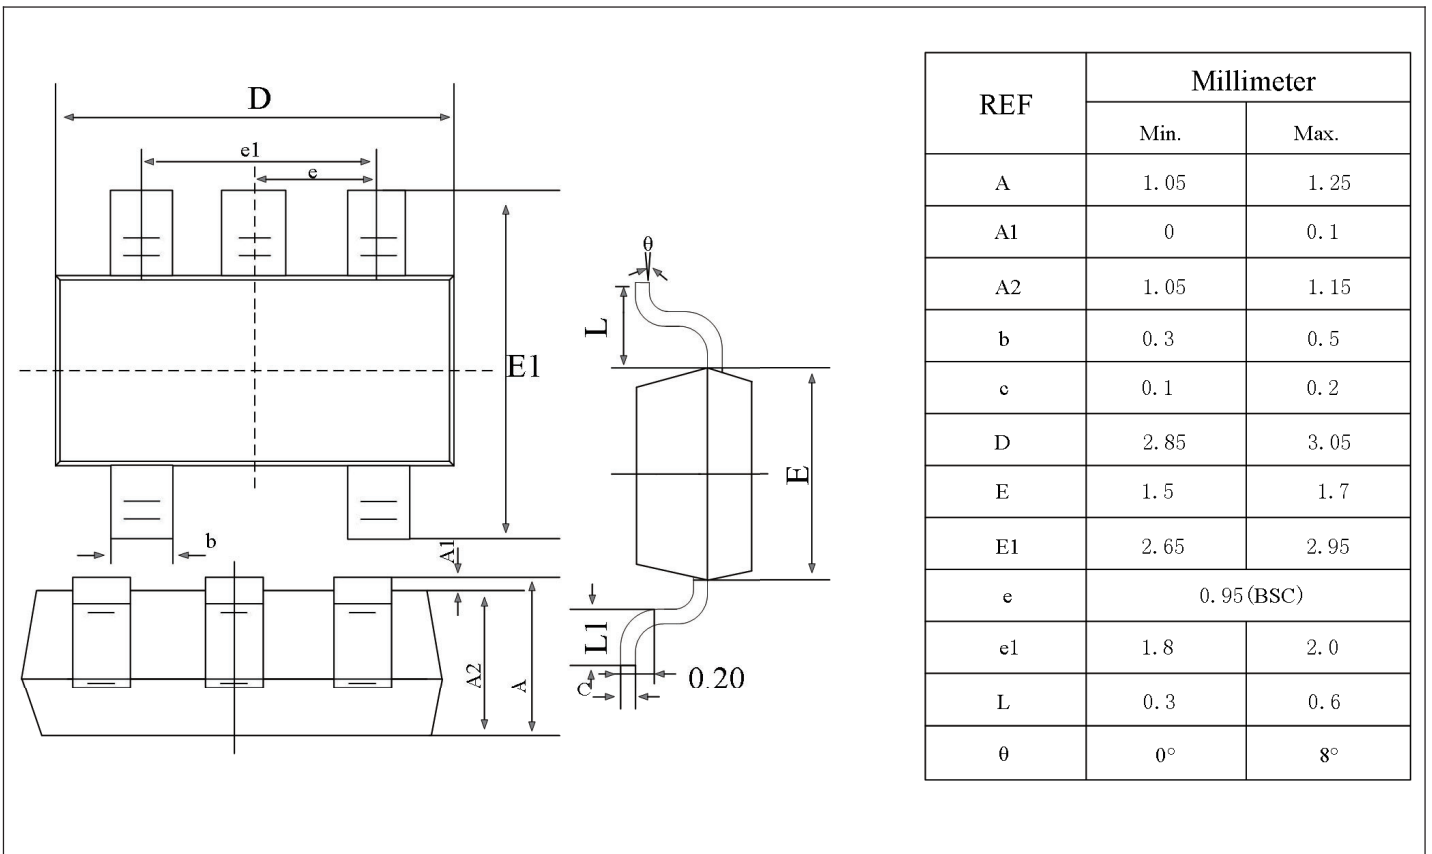

**30V,200mA,3uA,Low-Dropout Voltage Regulator**

**Packing Information**

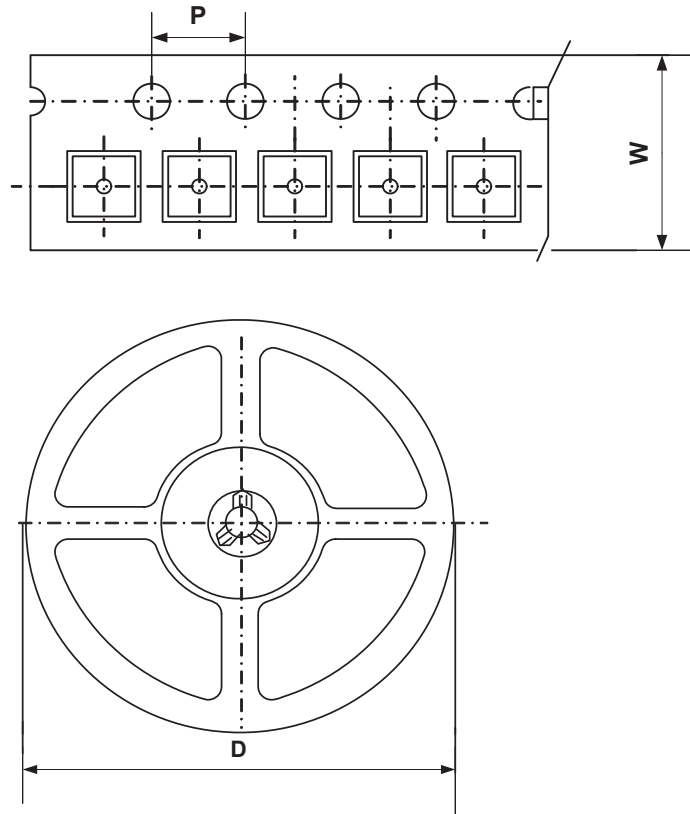

Type	W(mm)	P(mm)	D(mm)	Qty (pcs)
SOT23-3	8.0mm	4.0mm	178.0mm	3000pcs
SOT23-5	8.0mm	4.0mm	178.0mm	3000pcs
SOT89-3	12.0mm	4.0mm	178.0mm	1000pcs

**30V,200mA,3uA,Low-Dropout Voltage Regulator****Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives ([www.orientalsemi.com](http://www.orientalsemi.com)).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved