



## General Description

OST75N65HSMF-E uses advanced Oriental-Semi's patented Trident-Gate Bipolar Transistor (TGBT™) technology to provide extremely low  $V_{CE(sat)}$ , low gate charge, and excellent switching performance. This device is suitable for mid to high range switching frequency converters.

## Features

- Advanced TGBT™ technology
- Excellent conduction and switching loss
- Excellent stability and uniformity
- Fast and soft antiparallel diode



## Applications

- Induction converters
- Uninterruptible power supplies


## Key Performance Parameters

| Parameter                       | Value | Unit        |
|---------------------------------|-------|-------------|
| $V_{CES, min} @ 25^{\circ}C$    | 650   | V           |
| Maximum junction temperature    | 175   | $^{\circ}C$ |
| $I_C, pulse$                    | 300   | A           |
| $V_{CE(sat), typ} @ V_{GE}=15V$ | 1.4   | V           |
| $Q_g$                           | 201   | nC          |

## Marking Information

| Product Name   | Package | Marking     |
|----------------|---------|-------------|
| OST75N65HSMF-E | TO247   | OST75N65HSM |

## Package & Pin Information




**Absolute Maximum Ratings** at  $T_{vj}=25^{\circ}\text{C}$  unless otherwise noted

| Parameter                                                                | Symbol                | Value      | Unit               |
|--------------------------------------------------------------------------|-----------------------|------------|--------------------|
| Collector emitter voltage                                                | $V_{CES}$             | 650        | V                  |
| Gate emitter voltage                                                     | $V_{GES}$             | $\pm 20$   | V                  |
| Transient gate emitter voltage, $T_P \leq 10\mu\text{s}$ , $D < 0.01$    |                       | $\pm 30$   | V                  |
| Continuous collector current <sup>1)</sup> , $T_C = 25^{\circ}\text{C}$  | $I_C$                 | 90         | A                  |
| Continuous collector current <sup>1)</sup> , $T_C = 100^{\circ}\text{C}$ |                       | 75         | A                  |
| Pulsed collector current <sup>2)</sup> , $T_C = 25^{\circ}\text{C}$      | $I_{C, \text{pulse}}$ | 300        | A                  |
| Diode forward current <sup>1)</sup> , $T_C = 25^{\circ}\text{C}$         | $I_F$                 | 90         | A                  |
| Diode forward current <sup>1)</sup> , $T_C = 100^{\circ}\text{C}$        |                       | 75         | A                  |
| Diode pulsed current <sup>2)</sup> , $T_C = 25^{\circ}\text{C}$          | $I_{F, \text{pulse}}$ | 300        | A                  |
| Power dissipation <sup>3)</sup> , $T_C = 25^{\circ}\text{C}$             | $P_D$                 | 405        | W                  |
| Power dissipation <sup>3)</sup> , $T_C = 100^{\circ}\text{C}$            |                       | 203        | W                  |
| Operation and storage temperature                                        | $T_{stg}, T_{vj}$     | -55 to 175 | $^{\circ}\text{C}$ |

**Thermal Characteristics**

| Parameter                               | Symbol          | Value | Unit                 |
|-----------------------------------------|-----------------|-------|----------------------|
| IGBT thermal resistance, junction-case  | $R_{\theta JC}$ | 0.37  | $^{\circ}\text{C/W}$ |
| Diode thermal resistance, junction-case | $R_{\theta JC}$ | 0.38  | $^{\circ}\text{C/W}$ |
| Thermal resistance, junction-ambient    | $R_{\theta JA}$ | 40    | $^{\circ}\text{C/W}$ |


**Electrical Characteristics** at  $T_{vj}=25^{\circ}\text{C}$  unless otherwise specified

| Parameter                            | Symbol        | Min. | Typ. | Max. | Unit          | Test condition                                                             |
|--------------------------------------|---------------|------|------|------|---------------|----------------------------------------------------------------------------|
| Collector-emitter breakdown voltage  | $V_{(BR)CES}$ | 650  |      |      | V             | $V_{GE}=0\text{ V}$ , $I_C=0.5\text{ mA}$                                  |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ |      | 1.4  | 1.8  | V             | $V_{GE}=15\text{ V}$ , $I_C=75\text{ A}$<br>$T_{vj}=25^{\circ}\text{C}$    |
|                                      |               |      | 1.62 |      | V             | $V_{GE}=15\text{ V}$ , $I_C=75\text{ A}$ ,<br>$T_{vj}=125^{\circ}\text{C}$ |
|                                      |               |      | 1.74 |      | V             | $V_{GE}=15\text{ V}$ , $I_C=75\text{ A}$ ,<br>$T_{vj}=175^{\circ}\text{C}$ |
| Gate-emitter threshold voltage       | $V_{GE(th)}$  | 3.0  | 3.9  | 4.5  | V             | $V_{CE}=V_{GE}$ , $I_C=0.5\text{ mA}$                                      |
| Diode forward voltage                | $V_F$         |      | 1.55 |      | V             | $V_{GE}=0\text{ V}$ , $I_F=75\text{ A}$<br>$T_{vj}=25^{\circ}\text{C}$     |
|                                      |               |      | 1.46 |      | V             | $V_{GE}=0\text{ V}$ , $I_F=75\text{ A}$ ,<br>$T_{vj}=125^{\circ}\text{C}$  |
|                                      |               |      | 1.4  |      | V             | $V_{GE}=0\text{ V}$ , $I_F=75\text{ A}$ ,<br>$T_{vj}=175^{\circ}\text{C}$  |
| Gate-emitter leakage current         | $I_{GES}$     |      |      | 100  | nA            | $V_{CE}=0\text{ V}$ , $V_{GE}=20\text{ V}$                                 |
| Zero gate voltage collector current  | $I_{CES}$     |      |      | 10   | $\mu\text{A}$ | $V_{CE}=650\text{ V}$ , $V_{GE}=0\text{ V}$                                |


**Dynamic Characteristics**

| Parameter                    | Symbol       | Min. | Typ. | Max. | Unit | Test condition                                                                                                                 |
|------------------------------|--------------|------|------|------|------|--------------------------------------------------------------------------------------------------------------------------------|
| Input capacitance            | $C_{ies}$    |      | 8165 |      | pF   | $V_{GE}=0\text{ V}$ ,<br>$V_{CE}=25\text{ V}$ ,<br>$f=100\text{ kHz}$                                                          |
| Output capacitance           | $C_{oes}$    |      | 226  |      | pF   |                                                                                                                                |
| Reverse transfer capacitance | $C_{res}$    |      | 62   |      | pF   |                                                                                                                                |
| Turn-on delay time           | $t_{d(on)}$  |      | 45   |      | ns   | $V_{GE}=15\text{ V}$ ,<br>$V_{CC}=400\text{ V}$ ,<br>$R_G=10\ \Omega$ ,<br>$I_C=75\text{ A}$ ,<br>$T_{vj} = 25^\circ\text{C}$  |
| Rise time                    | $t_r$        |      | 53   |      | ns   |                                                                                                                                |
| Turn-off delay time          | $t_{d(off)}$ |      | 239  |      | ns   |                                                                                                                                |
| Fall time                    | $t_f$        |      | 59   |      | ns   |                                                                                                                                |
| Turn-on energy               | $E_{on}$     |      | 2.60 |      | mJ   |                                                                                                                                |
| Turn-off energy              | $E_{off}$    |      | 1.72 |      | mJ   |                                                                                                                                |
| Turn-on delay time           | $t_{d(on)}$  |      | 40   |      | ns   | $V_{GE}=15\text{ V}$ ,<br>$V_{CC}=400\text{ V}$ ,<br>$R_G=10\ \Omega$ ,<br>$I_C=30\text{ A}$ ,<br>$T_{vj} = 25^\circ\text{C}$  |
| Rise time                    | $t_r$        |      | 23   |      | ns   |                                                                                                                                |
| Turn-off delay time          | $t_{d(off)}$ |      | 284  |      | ns   |                                                                                                                                |
| Fall time                    | $t_f$        |      | 72   |      | ns   |                                                                                                                                |
| Turn-on energy               | $E_{on}$     |      | 0.91 |      | mJ   |                                                                                                                                |
| Turn-off energy              | $E_{off}$    |      | 0.68 |      | mJ   |                                                                                                                                |
| Turn-on delay time           | $t_{d(on)}$  |      | 44   |      | ns   | $V_{GE}=15\text{ V}$ ,<br>$V_{CC}=400\text{ V}$ ,<br>$R_G=10\ \Omega$ ,<br>$I_C=75\text{ A}$ ,<br>$T_{vj} = 175^\circ\text{C}$ |
| Rise time                    | $t_r$        |      | 55   |      | ns   |                                                                                                                                |
| Turn-off delay time          | $t_{d(off)}$ |      | 266  |      | ns   |                                                                                                                                |
| Fall time                    | $t_f$        |      | 84   |      | ns   |                                                                                                                                |
| Turn-on energy               | $E_{on}$     |      | 4.47 |      | mJ   |                                                                                                                                |
| Turn-off energy              | $E_{off}$    |      | 2.18 |      | mJ   |                                                                                                                                |
| Turn-on delay time           | $t_{d(on)}$  |      | 39   |      | ns   | $V_{GE}=15\text{ V}$ ,<br>$V_{CC}=400\text{ V}$ ,<br>$R_G=10\ \Omega$ ,<br>$I_C=30\text{ A}$ ,<br>$T_{vj} = 175^\circ\text{C}$ |
| Rise time                    | $t_r$        |      | 25   |      | ns   |                                                                                                                                |
| Turn-off delay time          | $t_{d(off)}$ |      | 327  |      | ns   |                                                                                                                                |
| Fall time                    | $t_f$        |      | 101  |      | ns   |                                                                                                                                |
| Turn-on energy               | $E_{on}$     |      | 1.89 |      | mJ   |                                                                                                                                |
| Turn-off energy              | $E_{off}$    |      | 0.98 |      | mJ   |                                                                                                                                |



### Gate Charge Characteristics

| Parameter             | Symbol   | Min. | Typ. | Max. | Unit | Test condition                                                         |
|-----------------------|----------|------|------|------|------|------------------------------------------------------------------------|
| Total gate charge     | $Q_g$    |      | 201  |      | nC   | $V_{GE}=15\text{ V}$ ,<br>$V_{CC}=520\text{ V}$ ,<br>$I_C=75\text{ A}$ |
| Gate-emitter charge   | $Q_{ge}$ |      | 59   |      | nC   |                                                                        |
| Gate-collector charge | $Q_{gc}$ |      | 68   |      | nC   |                                                                        |


### Body Diode Characteristics

| Parameter                           | Symbol    | Min. | Typ. | Max. | Unit          | Test condition                                                                                                      |
|-------------------------------------|-----------|------|------|------|---------------|---------------------------------------------------------------------------------------------------------------------|
| Diode reverse recovery time         | $t_{rr}$  |      | 170  |      | ns            | $V_R=400\text{ V}$ ,<br>$I_F=75\text{ A}$ ,<br>$di_F/dt=500\text{ A}/\mu\text{s}$ ,<br>$T_{vj} = 25^\circ\text{C}$  |
| Diode reverse recovery charge       | $Q_{rr}$  |      | 1.70 |      | $\mu\text{C}$ |                                                                                                                     |
| Diode peak reverse recovery current | $I_{rrm}$ |      | 18   |      | A             |                                                                                                                     |
| Diode reverse recovery time         | $t_{rr}$  |      | 255  |      | ns            | $V_R=400\text{ V}$ ,<br>$I_F=75\text{ A}$ ,<br>$di_F/dt=500\text{ A}/\mu\text{s}$ ,<br>$T_{vj} = 175^\circ\text{C}$ |
| Diode reverse recovery charge       | $Q_{rr}$  |      | 5.04 |      | $\mu\text{C}$ |                                                                                                                     |
| Diode peak reverse recovery current | $I_{rrm}$ |      | 33   |      | A             |                                                                                                                     |


### Note

- 1) Calculated continuous current based on maximum allowable junction temperature.
- 2) Repetitive rating; pulse width limited by max. junction temperature.
- 3)  $P_d$  is based on max. junction temperature, using junction-case thermal resistance.


## Electrical Characteristics Diagrams

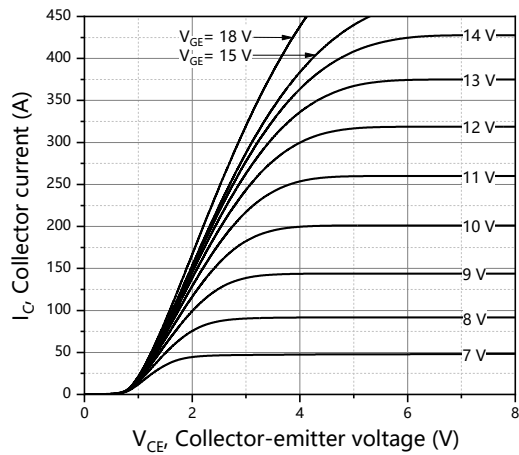


**Figure 1. Typical output characteristics**  
( $T_{vj}=25^{\circ}\text{C}$ )

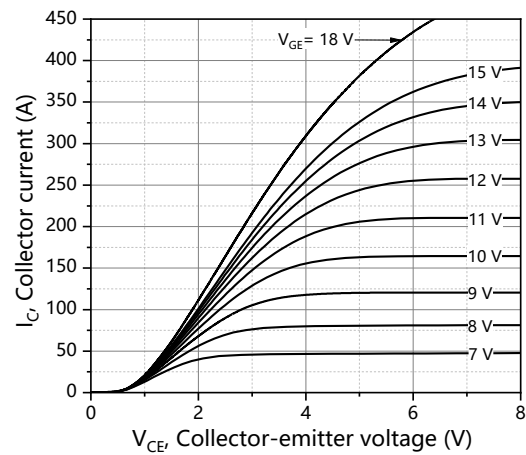


**Figure 2. Typical output characteristics**  
( $T_{vj}=150^{\circ}\text{C}$ )

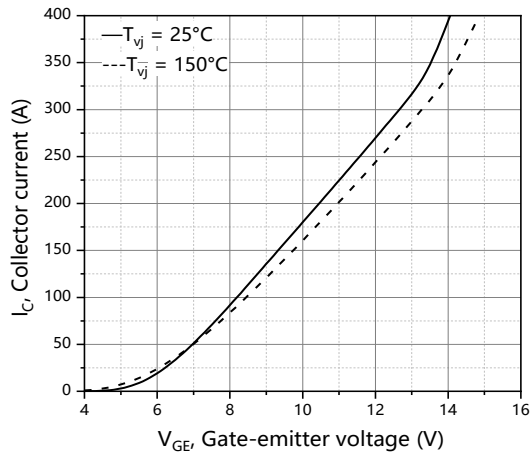


**Figure 3. Typical transfer characteristics**  
( $V_{CE}=20\text{V}$ )

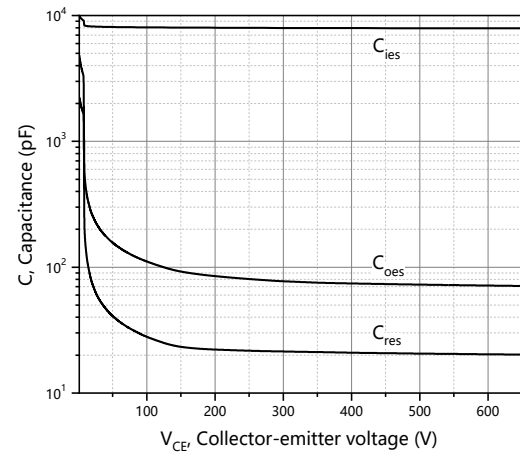


**Figure 4. Typical capacitance**  
( $V_{GE}=0\text{V}$ ,  $f=100\text{ kHz}$ )

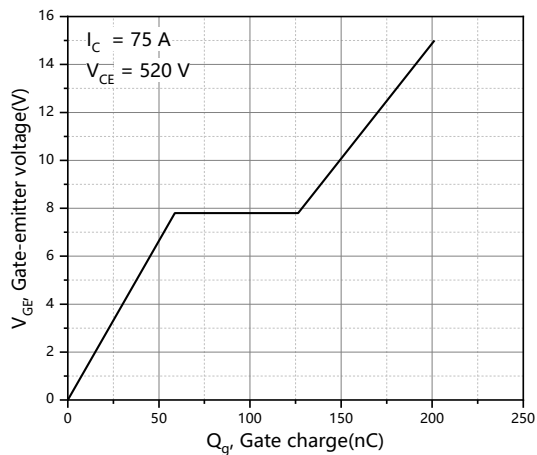


**Figure 5. Typical gate charge**

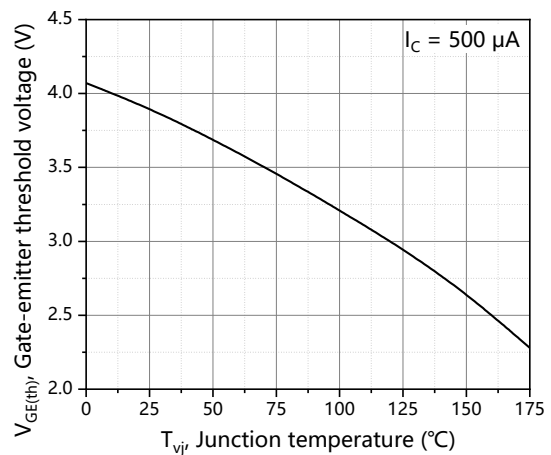


**Figure 6. Gate-emitter threshold voltage**

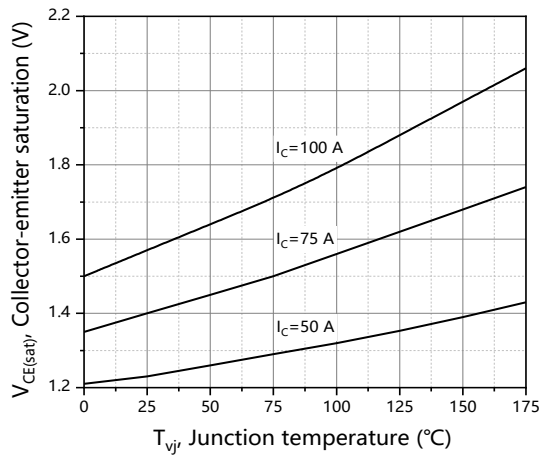


**Figure 7. Typical collector-emitter voltage**

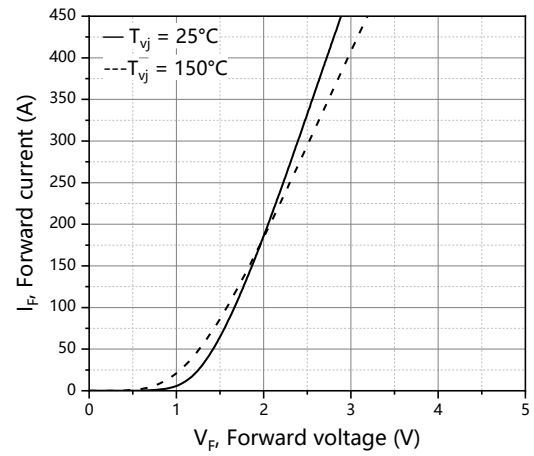


**Figure 8. Forward characteristic of diode**

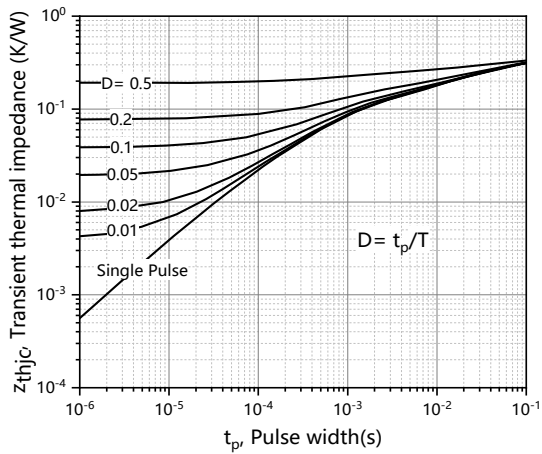


**Figure 9. IGBT transient thermal impedance**

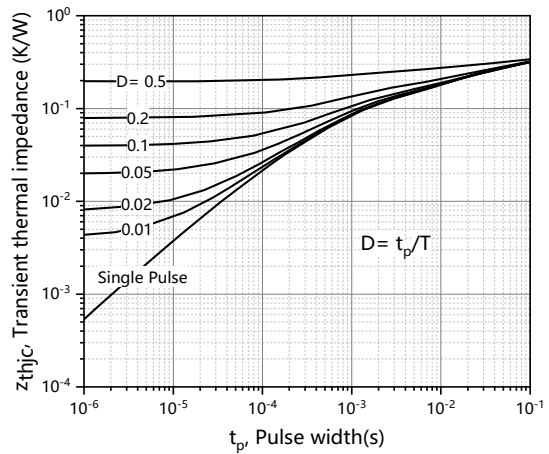

**Figure 10. Diode transient thermal impedance**

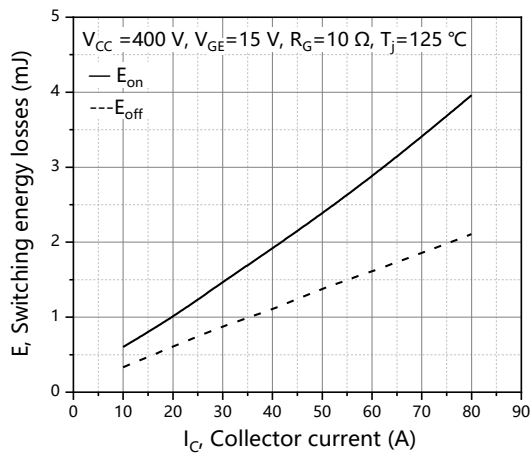

**Figure 11. Switching energy vs. collector current**

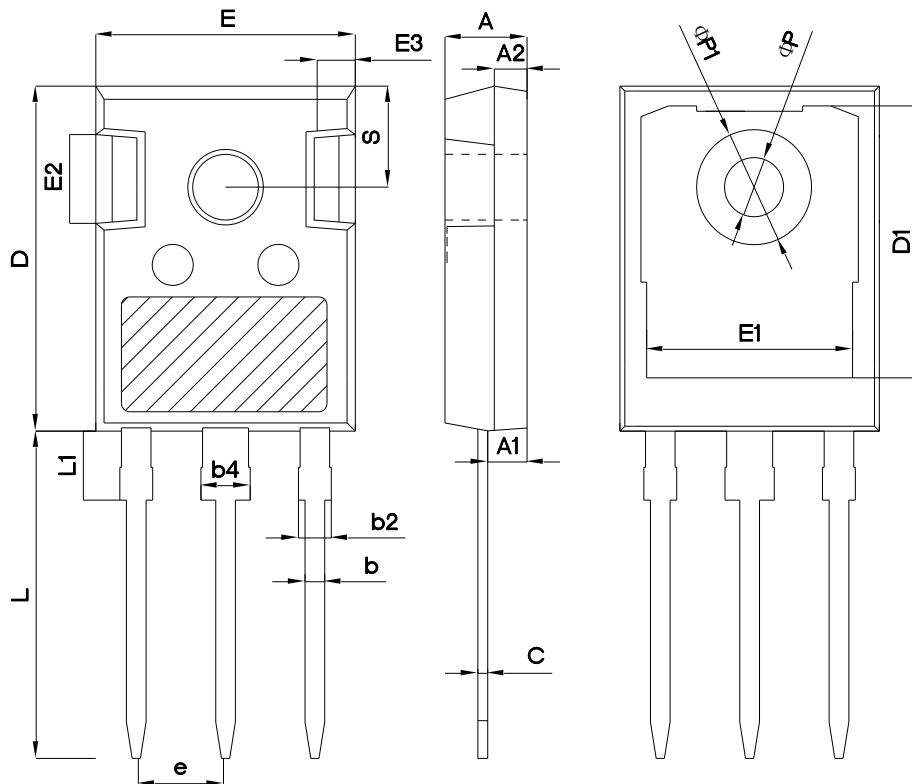**Package Information**


| Symbol | mm       |       |       |
|--------|----------|-------|-------|
|        | Min      | Nom   | Max   |
| A      | 4.80     | 5.00  | 5.20  |
| A1     | 2.21     | 2.41  | 2.59  |
| A2     | 1.85     | 2.00  | 2.15  |
| b      | 1.11     | 1.21  | 1.36  |
| b2     | 1.91     | 2.01  | 2.21  |
| b4     | 2.91     | 3.01  | 3.21  |
| c      | 0.51     | 0.61  | 0.75  |
| D      | 20.80    | 21.00 | 21.30 |
| D1     | 16.25    | 16.55 | 16.85 |
| E      | 15.50    | 15.80 | 16.10 |
| E1     | 13.00    | 13.30 | 13.60 |
| E2     | 4.80     | 5.00  | 5.20  |
| E3     | 2.30     | 2.50  | 2.70  |
| e      | 5.44 BSC |       |       |
| L      | 19.82    | 19.92 | 20.22 |
| L1     | -        | -     | 4.30  |
| ΦP     | 3.40     | 3.60  | 3.80  |
| ΦP1    | -        | -     | 7.30  |
| S      | 6.15 BSC |       |       |

Version : TO247-P package outline dimension

### Ordering Information

| Package Type | Units/ Tube | Tubes/ Inner Box | Units/ Inner Box | Inner Boxes/ Carton Box | Units/ Carton Box |
|--------------|-------------|------------------|------------------|-------------------------|-------------------|
| TO247-P      | 30          | 11               | 330              | 6                       | 1980              |

### Product Information

| Product        | Package | Pb Free | RoHS | Halogen Free |
|----------------|---------|---------|------|--------------|
| OST75N65HSMF-E | TO247   | yes     | yes  | yes          |

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives ([www.orientalsemi.com](http://www.orientalsemi.com)).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved 

**Revision History**

| Version | Revision History | Date       |
|---------|------------------|------------|
| V1.0    | Initial release  | 2025-10-21 |

