



General Description

This MOSFET uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a wide variety of applications.

Features

- Low gate charge
- High power and current handling capability
- Lead free product is acquired



Applications

- PWM applications
- Power management
- Load switch


Key Performance Parameters

Parameter	Value	Unit
V_{DS}	60	V
$R_{DS(ON), max} @ V_{GS}=10V$	80	m Ω

Marking Information

Product Name	Package	Marking
OSH06N80XF	SOT-89-3L	0680

Package & Pin information

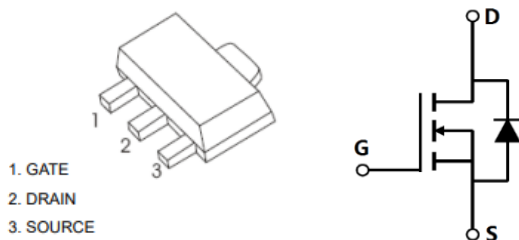

Absolute Maximum Ratings at $T_j=25^{\circ}\text{C}$ unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	60	V
Gate-source voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	3	A
Pulsed Drain Current ¹⁾	$I_{D,pulse}$	12	A
Power Dissipation	P_D	1.5	W
Single pulsed avalanche energy ²⁾	E_{AS}	10	mJ
Operation and storage temperature	T_{stg}, T_j	-55 to 150	$^{\circ}\text{C}$

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal resistance, junction-ambient	$R_{\theta JA}$	83	$^{\circ}\text{C/W}$

Electrical Characteristics at $T_j=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Drain-source breakdown voltage	BV_{DSS}	60			V	$V_{GS}=0\text{ V}, I_D=250\text{ }\mu\text{A}$
Gate threshold voltage	$V_{GS(th)}$	1.0		2.5	V	$V_{DS}=V_{GS}, I_D=250\text{ }\mu\text{A}$
Drain-source on-state resistance	$R_{DS(ON)}$		65	80	$\text{m}\Omega$	$V_{GS}=10\text{ V}, I_D=2\text{ A}$
Drain-source on-state resistance	$R_{DS(ON)}$		80	100	$\text{m}\Omega$	$V_{GS}=4.5\text{ V}, I_D=1.5\text{ A}$
Gate-source leakage current	I_{GSS}			± 100	nA	$V_{GS}=\pm 20\text{ V}, V_{DS}=0\text{ V}$
Drain-source leakage current	I_{DSS}			1	μA	$V_{DS}=60\text{ V}, V_{GS}=0\text{ V}$

Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C_{iss}		369		pF	$V_{GS}=0\text{ V}$, $V_{DS}=30\text{ V}$, $f=1\text{ MHz}$
Output capacitance	C_{oss}		28		pF	
Reverse transfer capacitance	C_{rss}		22		pF	
Gate resistance	R_g		0.78		Ω	$V_{GS}=0\text{ V}$, $V_{DS}=0\text{ V}$, $f=1.0\text{ MHz}$
Turn-on Delay Time	$t_{d(on)}$		5		ns	$V_{GS}=10\text{ V}$, $V_{DS}=30\text{ V}$, $R_L=15\text{ }\Omega$, $R_{GEN}=3\text{ }\Omega$
Turn-on Rise Time	t_r		8		ns	
Turn-Off Delay Time	$t_{d(off)}$		36		ns	
Turn-Off Fall Time	t_f		21		ns	

Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Total gate charge	Q_g		9.0		nC	$V_{GS}=10\text{ V}$, $V_{DS}=30\text{ V}$, $I_D=2\text{ A}$
Gate-source charge	Q_{gs}		1.6		nC	
Gate-drain charge	Q_{gd}		2.0		nC	

Body Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Source drain current (Body Diode)	I_{SD}			3	A	$T_A=25^\circ\text{C}$
Diode forward voltage ²⁾	V_{SD}			1.2	V	$I_S=2\text{ A}$, $V_{GS}=0\text{ V}$
Reverse Recovery Time	t_{rr}		20		ns	$I_F=2\text{ A}$, $di/dt=100\text{ A/us}$
Reverse Recovery Charge	Q_{rr}		8		nC	

- Note:**
- 1) Pulse width limited by maximum allowable junction temperature.
 - 2) EAS condition: $T_J=25^\circ\text{C}$, $V_{DD}=40\text{ V}$, $V_G=10\text{ V}$, $R_g=25\text{ }\Omega$, $L=0.5\text{ mH}$.
 - 3) Repetitive Rating: Pulse width limited by maximum junction temperature.

Electrical Characteristics Diagrams

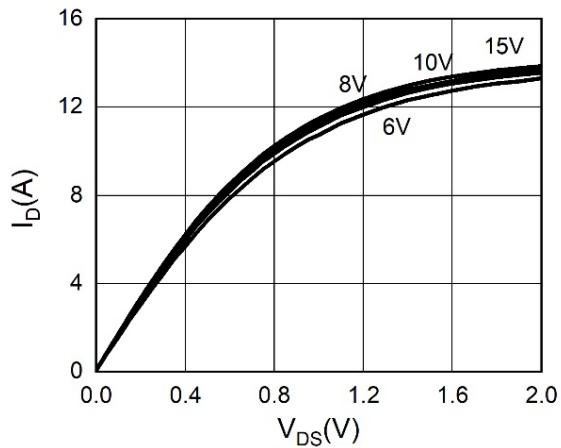


Figure 1. Typ. output characteristics

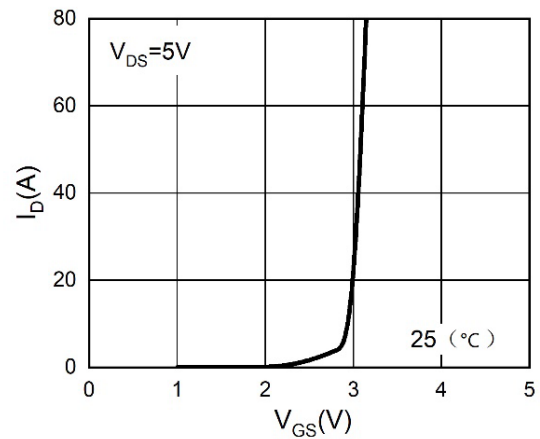


Figure 2. Typ. transfer characteristics

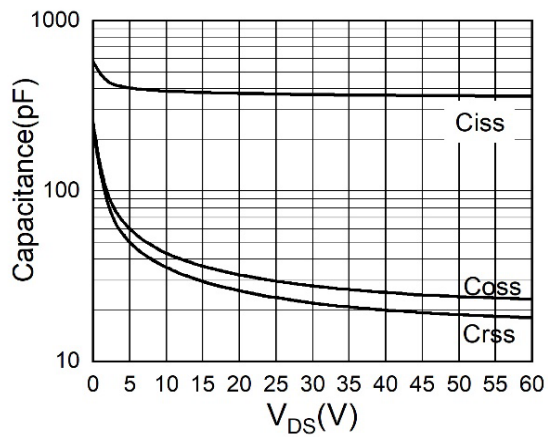


Figure 3. Capacitance

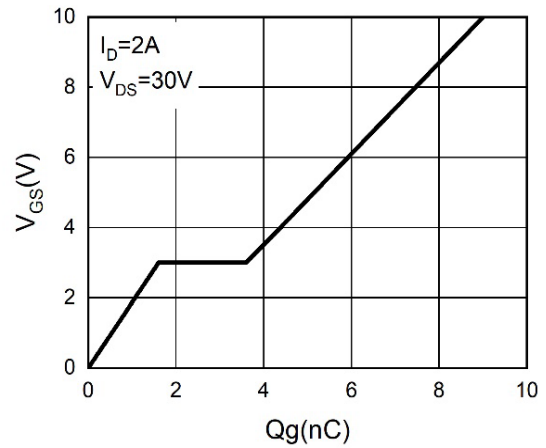


Figure 4. Gate charge

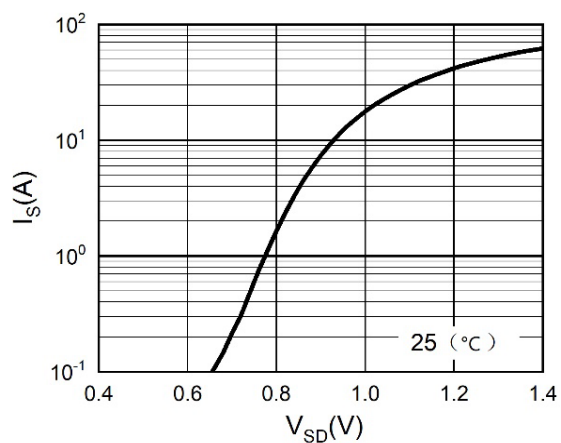


Figure 5. Body-diode characteristics


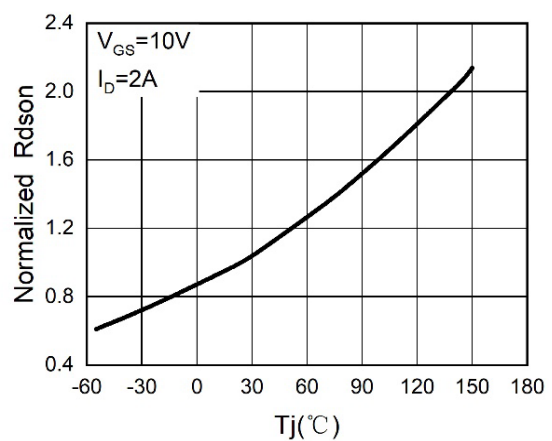


Figure 6. $R_{DS(ON)}$ vs junction temperature

Package Information

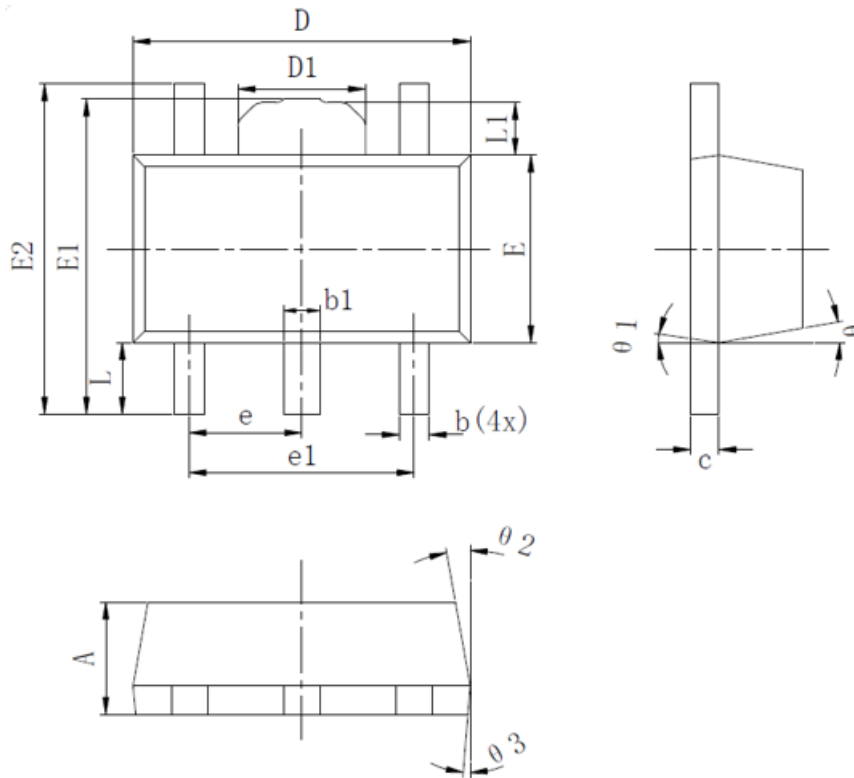

Symbol	mm		
	Min	TYP	Max
A	1.400	1.500	1.600
b	0.320	0.400	0.520
b1	0.400	0.480	0.580
c	0.350	0.381	0.440
D	4.400	4.500	4.460
D1	1.700REF		
E	2.400	2.500	2.600
E1	4.050	4.200	4.350
e	1.500TYP.		
e1	3.000TYP.		
L	0.800	0.950	1.200
L1	0.700REF		
θ	10° REF		
$\theta 1$	8° REF		
$\theta 2$	10° REF		
$\theta 3$	5° REF		

Version : SOT-89-V package outline dimension

Ordering Information

Package Type	Units/ Reel	Reels/ Inner Box	Units/ Inner Box	Inner Boxes/ Carton Box	Units/ Carton Box
SOT-89	1000	10	10000	4	40000

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives (www.orientalsemi.com).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved 