



General Description

This MOSFET uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 2.5V. This device is suitable for use as a wide variety of applications.

Features

- Reliable and Rugged
- High Dense Design
- Ultra Low On Resistance



Applications

- Load switch
- PWM applications
- Power management

Key Performance Parameters



Parameter	Value	Unit
V_{DS}	30	V
$R_{DS(ON), max} @ V_{GS}=10V$	35	m Ω

Marking Information

Product Name	Package	Marking
OSHL3400	SOT-23-3L	L3400

Package & Pin information

SOT-23-3L



Absolute Maximum Ratings at $T_j=25^{\circ}\text{C}$ unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	30	V
Gate-source voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	5.8	A
Pulsed Drain Current ¹⁾	$I_{D,pulse}$	30	A
Power Dissipation ²⁾	P_D	1.5	W
Operation and storage temperature	T_{stg}, T_j	-55 to 150	$^{\circ}\text{C}$

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal resistance, junction-ambient ²⁾	$R_{\theta JA}$	101	$^{\circ}\text{C/W}$

Electrical Characteristics at $T_j=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Drain-source breakdown voltage	BV_{DSS}	30			V	$V_{GS}=0\text{ V}, I_D=250\text{ }\mu\text{A}$
Gate threshold voltage	$V_{GS(th)}$	0.6		1.5	V	$V_{DS}=V_{GS}, I_D=250\text{ }\mu\text{A}$
Drain-source on-state resistance	$R_{DS(ON)}$		25	35	$\text{m}\Omega$	$V_{GS}=10\text{ V}, I_D=5.8\text{ A}$
Drain-source on-state resistance	$R_{DS(ON)}$		27	40	$\text{m}\Omega$	$V_{GS}=4.5\text{ V}, I_D=5\text{ A}$
Drain-source on-state resistance	$R_{DS(ON)}$		33	52	$\text{m}\Omega$	$V_{GS}=2.5\text{ V}, I_D=4\text{ A}$
Gate-source leakage current	I_{GSS}			± 100	nA	$V_{GS}=\pm 12\text{ V}, V_{DS}=0\text{ V}$
Drain-source leakage current	I_{DSS}			1	μA	$V_{DS}=30\text{ V}, V_{GS}=0\text{ V}$

Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C_{iss}		810		pF	$V_{GS}=0\text{ V}$, $V_{DS}=15\text{ V}$, $f=1\text{ MHz}$
Output capacitance	C_{oss}		90		pF	
Reverse transfer capacitance	C_{rss}		85		pF	
Turn-on Delay Time	$t_{d(on)}$		3.3		ns	$V_{GS}=10\text{ V}$, $V_{DS}=15\text{ V}$, $R_L=2.7\ \Omega$, $R_{GEN}=3\ \Omega$
Turn-on Rise Time	t_r		4.8		ns	
Turn-Off Delay Time	$t_{d(off)}$		26		ns	
Turn-Off Fall Time	t_f		4		ns	

Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Total gate charge	Q_g		9.8		nC	$V_{GS}=4.5\text{ V}$, $V_{DS}=15\text{ V}$, $I_D=5.8\text{ A}$
Gate-source charge	Q_{gs}		1.6		nC	
Gate-drain charge	Q_{gd}		3.0		nC	

Body Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Source drain current (Body Diode)	I_{SD}			5.8	A	$T_A=25^\circ\text{C}$
Diode forward voltage	V_{SD}			1.0	V	$I_S=1\text{ A}$, $V_{GS}=0\text{ V}$

Note:

- 1) Pulse width limited by maximum allowable junction temperature
- 2) The value of P_D & $R_{\theta JA}$ is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, double sided, in a still air environment with $T_a=25^\circ\text{C}$.

Electrical Characteristics Diagrams

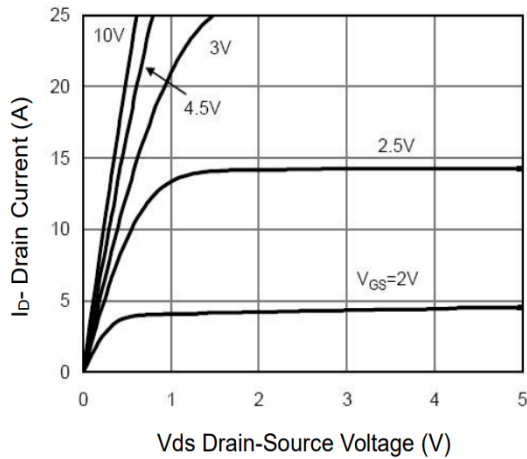


Figure 1. Typ. output characteristics

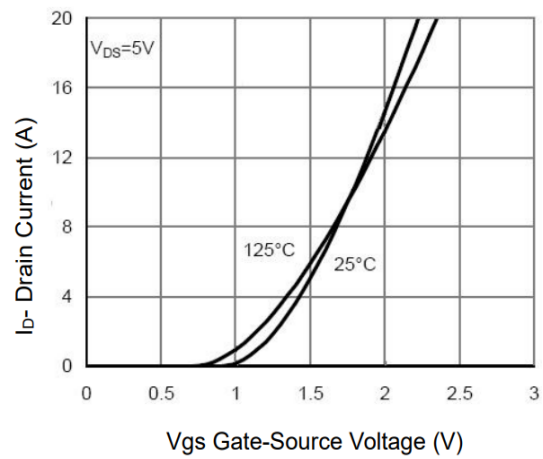


Figure 2. Typ. transfer characteristics

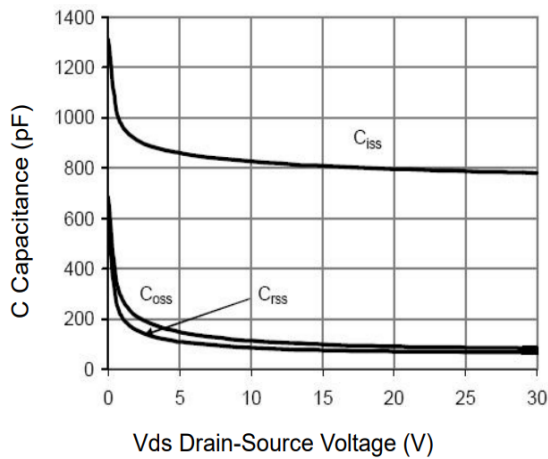


Figure 3. Capacitance

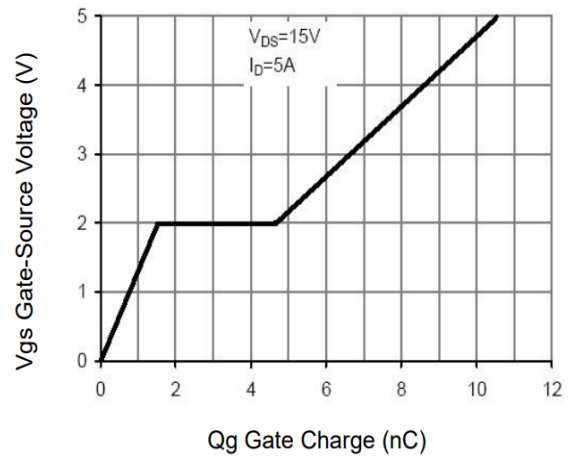


Figure 4. Gate charge

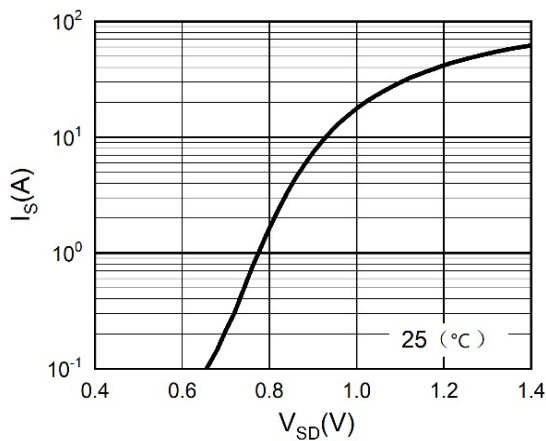


Figure 5. Body-diode characteristics


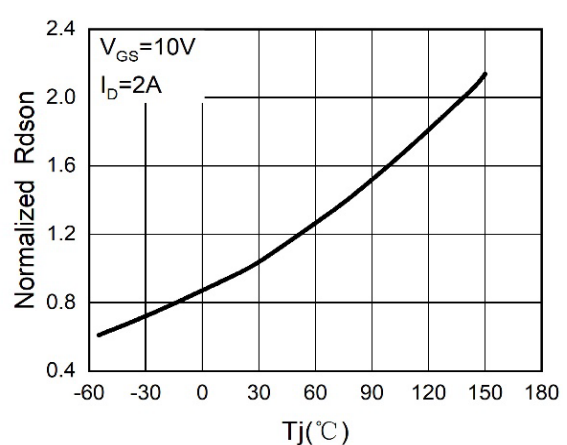


Figure 6. $R_{DS(on)}$ vs junction temperature

Package Information

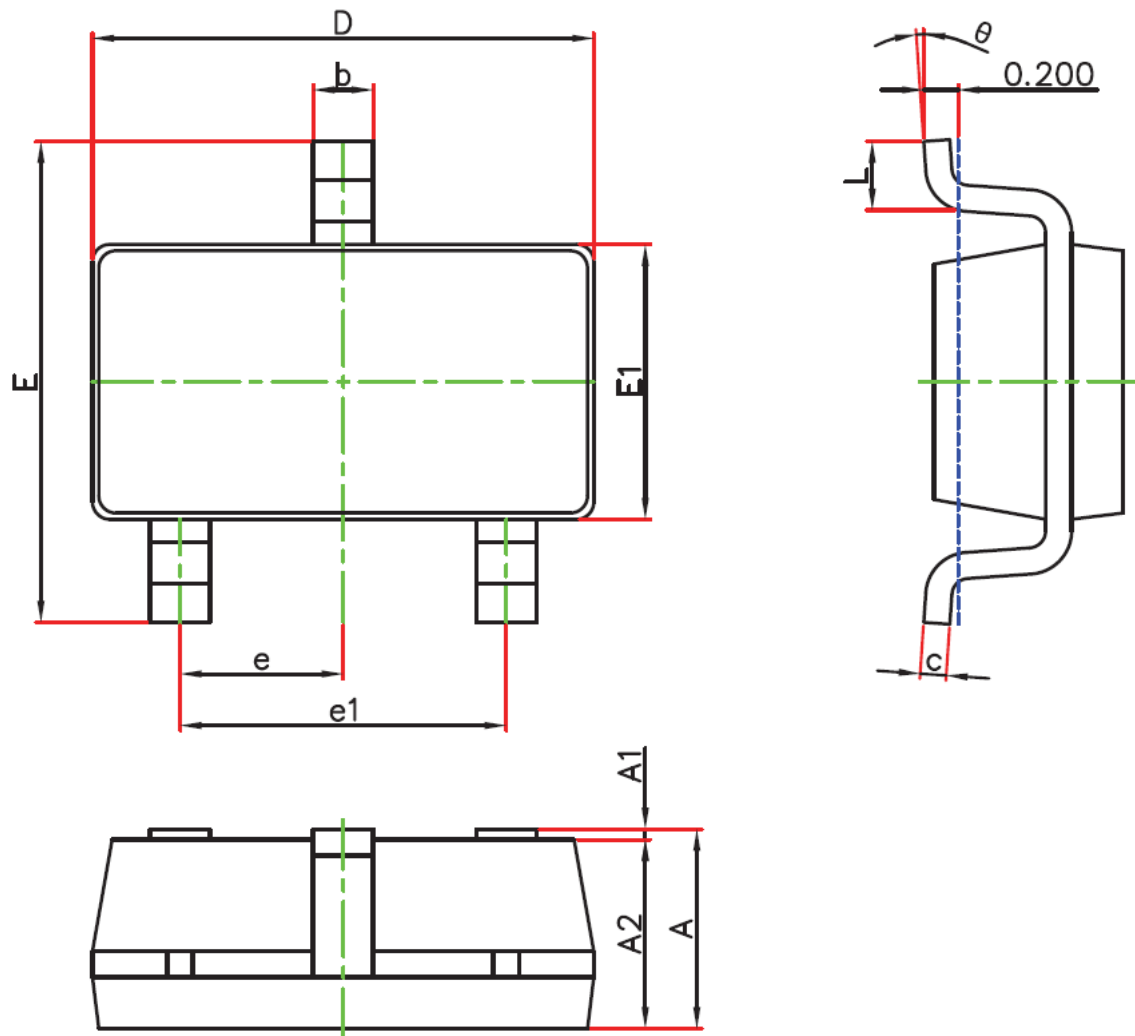

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Version : SOT-23-V package outline dimension

Ordering Information

Package Type	Units/ Reel	Reels/ Inner Box	Units/ Inner Box	Inner Boxes/ Carton Box	Units/ Carton Box
SOT-23	3000	15	45000	4	180000

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives (www.orientalsemi.com).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved 