



General Description

OST75N120H5UM2F-E uses advanced Oriental-Semi's patented Trident-Gate Bipolar Transistor (TGBT™) technology to provide extremely low $V_{CE(sat)}$, low gate charge, and excellent switching performance. This device is suitable for mid to high range switching frequency converters.

Features

- Advanced TGBT™ technology
- Excellent conduction and switching loss
- Excellent stability and uniformity
- Fast and soft antiparallel diode



Applications

- Induction converters
- Uninterruptible power supplies


Key Performance Parameters

Parameter	Value	Unit
$V_{CES, min} @ 25\text{ }^{\circ}\text{C}$	1200	V
Maximum junction temperature	175	$^{\circ}\text{C}$
$I_C, \text{ pulse}$	300	A
$V_{CE(sat), typ} @ V_{GE}=15\text{ V}$	1.5	V
Q_g	434	nC

Marking Information

Product Name	Package	Marking
OST75N120H5UM2F-E	TO247-plus	OST75N120H5UM2

Package & Pin Information




Absolute Maximum Ratings at $T_{vj}=25\text{ }^{\circ}\text{C}$ unless otherwise noted

Parameter	Symbol	Value	Unit
Collector emitter voltage	V_{CES}	1200	V
Gate emitter voltage	V_{GES}	± 20	V
Transient gate emitter voltage, $T_P \leq 10\text{ }\mu\text{s}$, $D < 0.01$		± 30	V
Continuous collector current ¹⁾ , $T_C = 25\text{ }^{\circ}\text{C}$	I_C	120	A
Continuous collector current ¹⁾ , $T_C = 100\text{ }^{\circ}\text{C}$		75	A
Pulsed collector current ²⁾ , $T_C = 25\text{ }^{\circ}\text{C}$	$I_{C, \text{ pulse}}$	300	A
Diode forward current ¹⁾ , $T_C = 25\text{ }^{\circ}\text{C}$	I_F	120	A
Diode forward current ¹⁾ , $T_C = 100\text{ }^{\circ}\text{C}$		75	A
Diode pulsed current ²⁾ , $T_C = 25\text{ }^{\circ}\text{C}$	$I_{F, \text{ pulse}}$	300	A
Power dissipation ³⁾ , $T_C = 25\text{ }^{\circ}\text{C}$	P_D	625	W
Power dissipation ³⁾ , $T_C = 100\text{ }^{\circ}\text{C}$		313	W
Operation and storage temperature	T_{stg}, T_{vj}	-55 to 175	$^{\circ}\text{C}$

Thermal Characteristics

Parameter	Symbol	Value	Unit
IGBT thermal resistance, junction-case	$R_{\theta JC}$	0.24	$^{\circ}\text{C/W}$
Diode thermal resistance, junction-case	$R_{\theta JC}$	0.45	$^{\circ}\text{C/W}$
Thermal resistance, junction-ambient	$R_{\theta JA}$	40	$^{\circ}\text{C/W}$

Electrical Characteristics at $T_{vj}=25\text{ }^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Collector-emitter breakdown voltage	$V_{(BR)CES}$	1200			V	$V_{GE}=0\text{ V}$, $I_C=0.5\text{ mA}$
Collector-emitter saturation voltage	$V_{CE(sat)}$		1.5	1.8	V	$V_{GE}=15\text{ V}$, $I_C=75\text{ A}$, $T_{vj}=25\text{ }^{\circ}\text{C}$
			1.89		V	$V_{GE}=15\text{ V}$, $I_C=75\text{ A}$, $T_{vj}=125\text{ }^{\circ}\text{C}$
			2.21		V	$V_{GE}=15\text{ V}$, $I_C=75\text{ A}$, $T_{vj}=175\text{ }^{\circ}\text{C}$
Gate-emitter threshold voltage	$V_{GE(th)}$	5.0	5.4	6.0	V	$V_{CE}=V_{GE}$, $I_C=0.5\text{ mA}$
Diode forward voltage	V_F		2.65		V	$V_{GE}=0\text{ V}$, $I_F=75\text{ A}$, $T_{vj}=25\text{ }^{\circ}\text{C}$
			2.33		V	$V_{GE}=0\text{ V}$, $I_F=75\text{ A}$, $T_{vj}=125\text{ }^{\circ}\text{C}$
			2.13		V	$V_{GE}=0\text{ V}$, $I_F=75\text{ A}$, $T_{vj}=175\text{ }^{\circ}\text{C}$
Gate-emitter leakage current	I_{GES}			100	nA	$V_{CE}=0\text{ V}$, $V_{GE}=20\text{ V}$
Zero gate voltage collector current	I_{CES}			10	μA	$V_{CE}=1200\text{ V}$, $V_{GE}=0\text{ V}$

Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C_{ies}		16238		pF	$V_{GE}=0\text{ V}$, $V_{CE}=25\text{ V}$, $f=100\text{ kHz}$
Output capacitance	C_{oes}		252		pF	
Reverse transfer capacitance	C_{res}		81		pF	
Turn-on delay time	$t_{d(on)}$		106		ns	$V_{GE}=15\text{ V}$, $V_{CC}=600\text{ V}$, $R_G=10\ \Omega$, $I_C=75\text{ A}$, $T_{vj}=25\text{ }^\circ\text{C}$
Rise time	t_r		76		ns	
Turn-off delay time	$t_{d(off)}$		420		ns	
Fall time	t_f		54		ns	
Turn-on energy	E_{on}		5.06		mJ	
Turn-off energy	E_{off}		2.73		mJ	
Turn-on delay time	$t_{d(on)}$		101		ns	$V_{GE}=15\text{ V}$, $V_{CC}=600\text{ V}$, $R_G=10\ \Omega$, $I_C=30\text{ A}$, $T_{vj}=25\text{ }^\circ\text{C}$
Rise time	t_r		28		ns	
Turn-off delay time	$t_{d(off)}$		475		ns	
Fall time	t_f		31		ns	
Turn-on energy	E_{on}		1.64		mJ	
Turn-off energy	E_{off}		1.12		mJ	
Turn-on delay time	$t_{d(on)}$		99		ns	$V_{GE}=15\text{ V}$, $V_{CC}=600\text{ V}$, $R_G=10\ \Omega$, $I_C=75\text{ A}$, $T_{vj}=175\text{ }^\circ\text{C}$
Rise time	t_r		80		ns	
Turn-off delay time	$t_{d(off)}$		467		ns	
Fall time	t_f		80		ns	
Turn-on energy	E_{on}		7.62		mJ	
Turn-off energy	E_{off}		3.44		mJ	
Turn-on delay time	$t_{d(on)}$		92		ns	$V_{GE}=15\text{ V}$, $V_{CC}=600\text{ V}$, $R_G=10\ \Omega$, $I_C=30\text{ A}$, $T_{vj}=175\text{ }^\circ\text{C}$
Rise time	t_r		32		ns	
Turn-off delay time	$t_{d(off)}$		537		ns	
Fall time	t_f		50		ns	
Turn-on energy	E_{on}		2.95		mJ	
Turn-off energy	E_{off}		1.45		mJ	



Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Total gate charge	Q_g		434		nC	$V_{GE}=15\text{ V}$, $V_{CC}=960\text{ V}$, $I_C=75\text{ A}$
Gate-emitter charge	Q_{ge}		128		nC	
Gate-collector charge	Q_{gc}		164		nC	

Body Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Diode reverse recovery time	t_{rr}		309		ns	$V_R=600\text{ V}$, $I_F=75\text{ A}$, $di_F/dt=500\text{ A}/\mu\text{s}$, $T_{vj}=25\text{ }^\circ\text{C}$
Diode reverse recovery charge	Q_{rr}		2.88		μC	
Diode peak reverse recovery current	I_{rrm}		18		A	
Diode reverse recovery time	t_{rr}		511		ns	$V_R=600\text{ V}$, $I_F=75\text{ A}$, $di_F/dt=500\text{ A}/\mu\text{s}$, $T_{vj}=175\text{ }^\circ\text{C}$
Diode reverse recovery charge	Q_{rr}		7.32		μC	
Diode peak reverse recovery current	I_{rrm}		29		A	

Note

- 1) Calculated continuous current based on maximum allowable junction temperature.
- 2) Repetitive rating; pulse width limited by max. junction temperature.
- 3) P_d is based on max. junction temperature, using junction-case thermal resistance.

Electrical Characteristics Diagrams

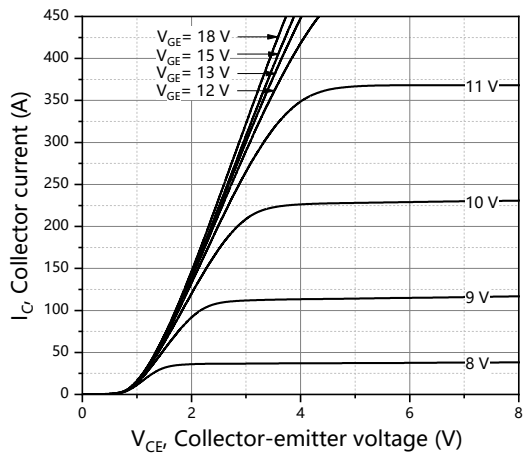


Figure 1. Typical output characteristics
($T_{vj}=25\text{ }^{\circ}\text{C}$)

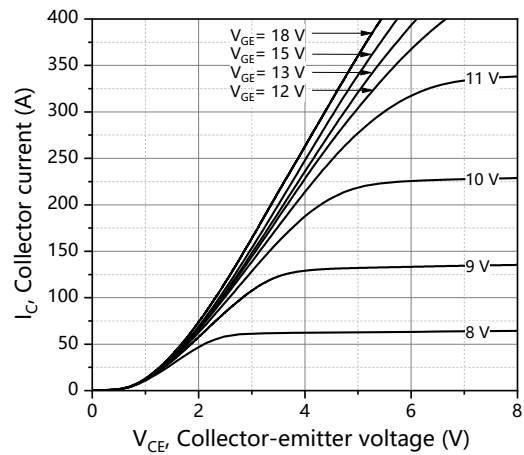


Figure 2. Typical output characteristics
($T_{vj}=150\text{ }^{\circ}\text{C}$)

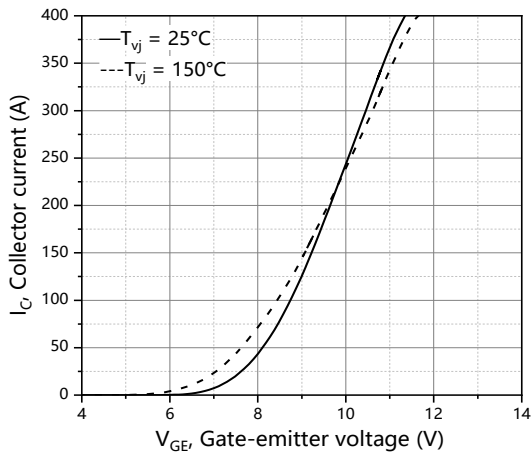


Figure 3. Typical transfer characteristics
($V_{CE}=20\text{ V}$)

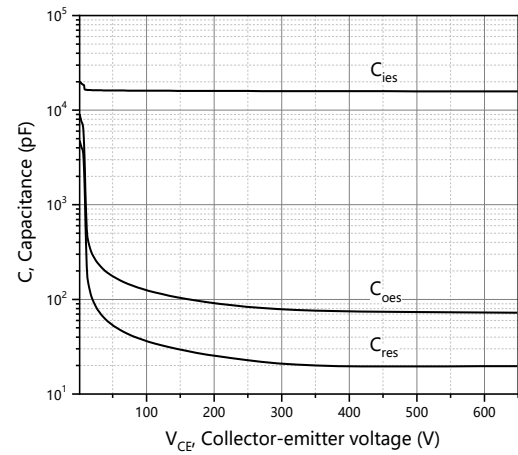


Figure 4. Typical capacitance
($V_{GE}=0\text{ V}$, $f=100\text{ kHz}$)

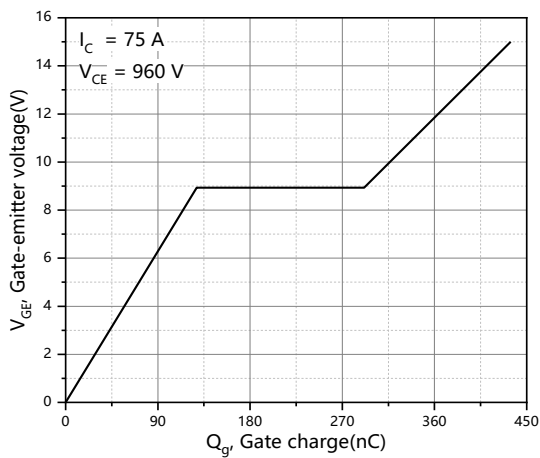


Figure 5. Typical gate charge

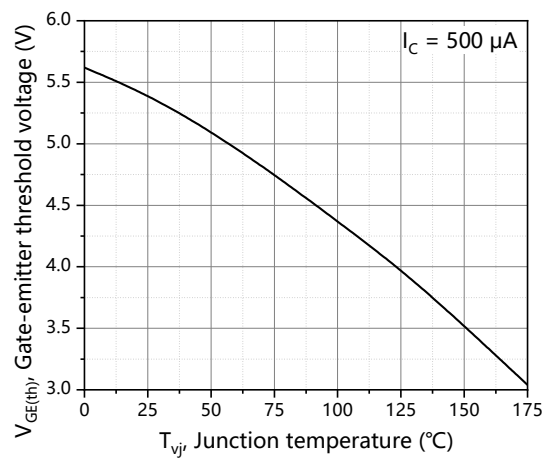


Figure 6. Gate-emitter threshold voltage

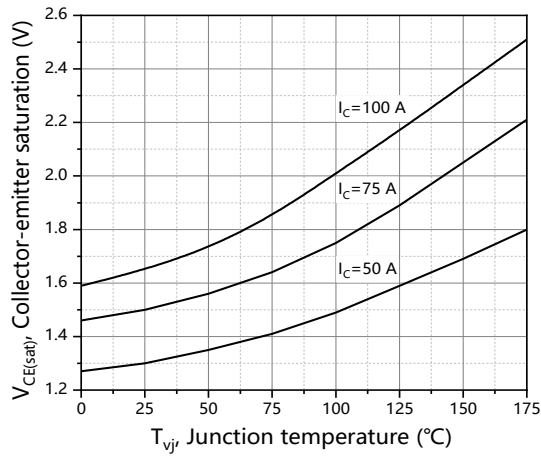


Figure 7. Typical collector-emitter voltage

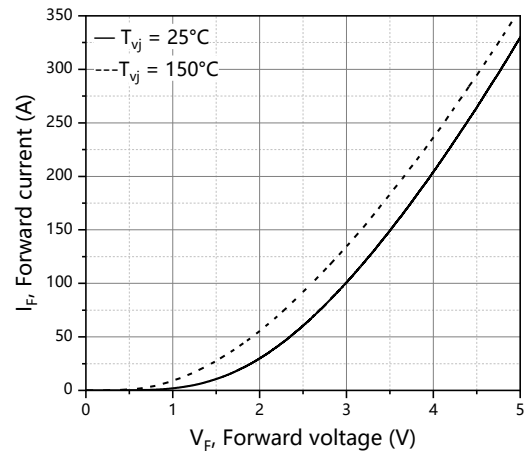


Figure 8. Forward characteristic of diode

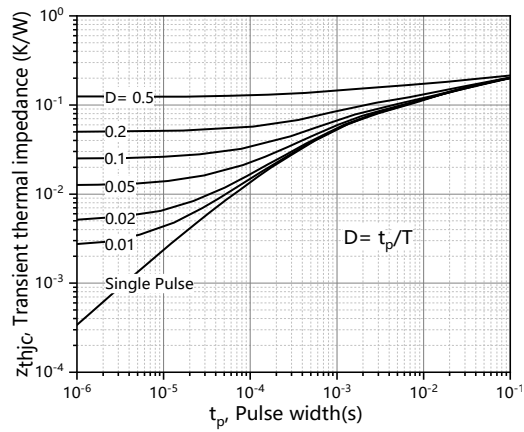


Figure 9. IGBT transient thermal impedance

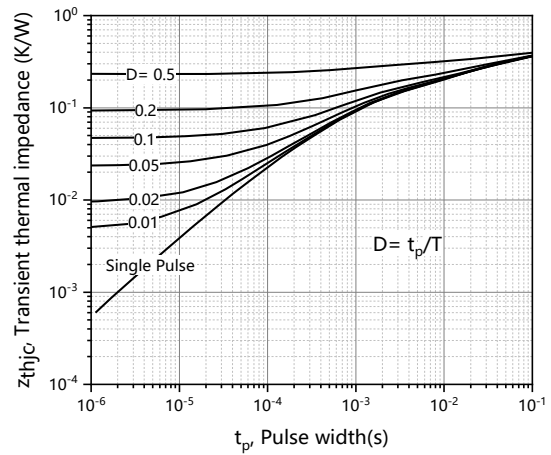


Figure 10. Diode transient thermal impedance


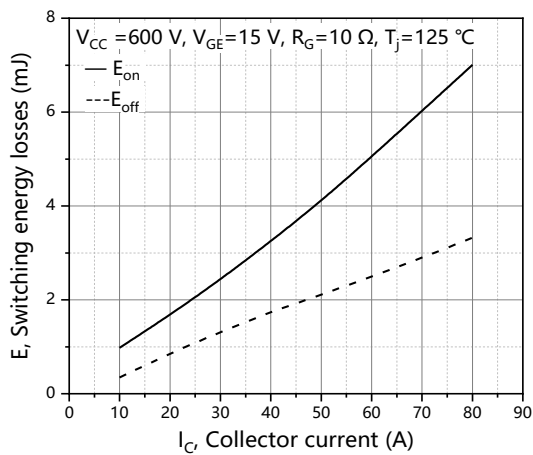


Figure 11. Switching energy vs. collector current

Package Information

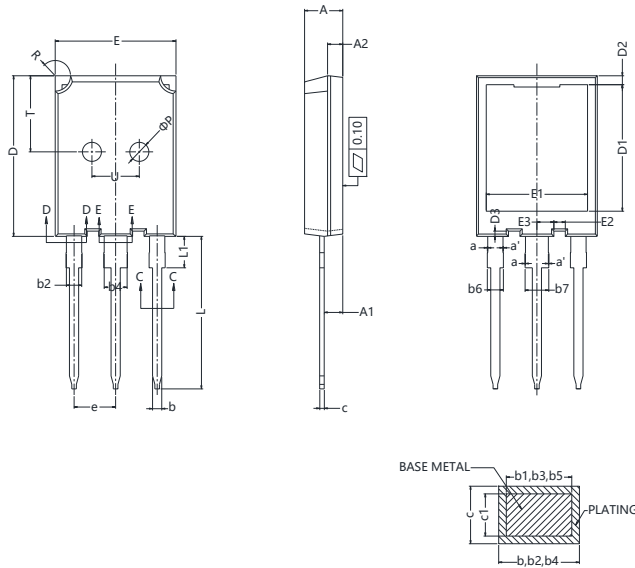

SECTION C-C, D-D & E-E

Symbol	mm		
	Min	Nom	Max
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
a	0.00		0.15
a'	0.00		0.15
b	1.16		1.26
b1	1.15	1.20	1.22
b2	1.96		2.06
b3	1.95	2.00	2.02
b4	2.96		3.06
b5	2.96	3.00	3.02
b6			2.25
b7			3.25
c	0.59		0.66
c1	0.59	0.60	0.66
D	20.90	21.00	21.10
D1	16.25	16.55	16.85
D2	1.05	1.17	1.35
D3	0.58		0.78
E	15.70	15.80	15.90
E1	13.10	13.30	13.50
E2	1.40	1.50	1.60
E3	2.12	2.22	2.32
e	5.436 BSC		
L	19.80	19.95	20.10
L1			4.30
P	2.40	2.50	2.60
R	1.90		2.10
T	9.80		10.20
U	6.00		6.40

Version : TO247-plus-J package outline dimension

Ordering Information

Package Type	Units/ Tube	Tubes/ Inner Box	Units/ Inner Box	Inner Boxes/ Carton Box	Units/ Carton Box
TO247-plus-J	30	20	600	4	2400

Product Information

Product	Package	Pb Free	RoHS	Halogen Free
OST75N120H5UM2F-E	TO247-plus	yes	yes	yes

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives (www.orientalsemi.com).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved 

Revision History

Version	Revision History	Date
V1.0	Initial release	2025-08-12